

CATCHFORS A/S M+S



UTQG: 420AA — 450AA



4 SEASON




STABILITY



ECONOMY




WET




The compound mixture ensures longevity without compromising on safety and performance.




This unique design offers stability in cornering, it has superior performance due to its superior design where the CATCHFOR A/S provides performance as an all-rounder tyre, the CATCHFOR A/S provides superior performance in cornering on slippery conditions.



This design has a superior pitch frequency, which offers a considerable reduction in noise, offering a very comfortable and quiet ride.



Superior high tensile steel belts for durability, nylon blend cap to maximize the contact area with the road surface, all of these combined exceeds the goal of having a tyre which not only meets the needs of an exceptional all seasons tyre, but also provides exceptional performance.

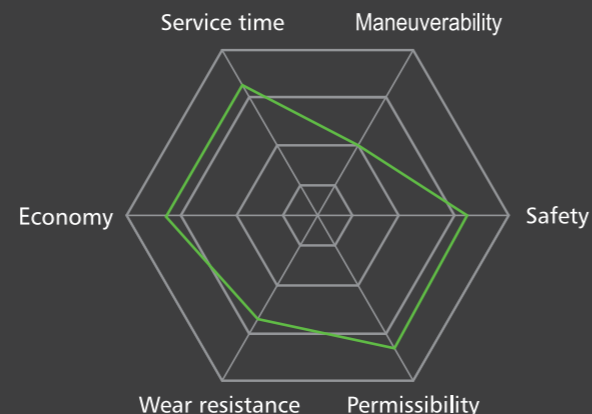

CATCHFORS A/S M+S



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description	
									Kg	lbs	Kpa	Psi		
18	245/45ZR18 XL	-	100	Y	7.8	243	8J	677	420AA	800	1764	340	50	BSW
	245/40ZR18 XL	-	97	Y	7.8	248	8 1/2J	653	420AA	730	1609	340	50	BSW
	235/50R18 XL	-	101	W	7.8	245	7 1/2J	693	420AA	825	1819	340	50	BSW
	225/55R18 XL	-	102	V	7.8	233	7J	705	420AA	850	1874	340	50	BSW
	225/45R18 XL	-	95	W	7.8	225	7 1/2J	659	420AA	690	1521	340	50	BSW
	225/40ZR18 XL	-	92	Y	7.8	230	8J	637	420AA	630	1389	340	50	BSW
17	235/65R17 XL	-	108	V	7.8	240	7J	738	420AA	1000	2205	340	50	BSW
	235/55R17 XL	-	103	W	7.8	245	7 1/2J	690	420AA	875	1929	340	50	BSW
	235/45R17 XL	-	97	W	7.8	236	8J	644	420AA	730	1609	340	50	BSW
	225/65R17 XL	-	106	V	7.8	228	6 1/2J	724	420AA	950	2094	340	50	BSW
	225/60R17 XL	-	103	V	7.8	228	6 1/2J	702	420AA	875	1929	340	50	BSW
	225/55R17 XL	-	101	W	7.8	233	7J	680	420AA	825	1819	340	50	BSW
	225/50R17 XL	-	98	W	7.8	233	7J	658	420AA	750	1653	340	50	BSW
	225/45R17 XL	-	94	W	7.8	225	7 1/2J	634	420AA	670	1477	340	50	BSW
	215/60R17 XL	-	100	V	7.8	221	6 1/2J	690	420AA	800	1764	340	50	BSW
	215/55R17 XL	-	98	W	7.8	226	7J	668	420AA	750	1653	340	50	BSW
	215/50R17 XL	-	95	W	7.8	226	7J	648	420AA	690	1521	340	50	BSW
	215/45R17 XL	-	91	W	7.8	213	7J	626	420AA	615	1356	340	50	BSW
	205/50R17 XL	-	93	W	7.8	214	6 1/2J	638	420AA	650	1433	340	50	BSW
16	205/45R17 XL	-	88	W	7.8	206	7J	616	420AA	560	1235	340	50	BSW
	225/55R16 XL	-	99	W	7.8	233	7J	654	420AA	775	1709	340	50	BSW
	215/70R16	-	100	H	7.8	221	6 1/2J	708	420AA	800	1764	300	44	BSW
	215/65R16 XL	-	102	H	7.8	221	6 1/2J	686	420AA	850	1874	340	50	BSW
	215/60R16 XL	-	99	H	7.8	221	6 1/2J	664	420AA	775	1709	340	50	BSW
	215/55R16 XL	-	97	V	7.8	226	7J	642	420AA	730	1609	340	50	BSW
	215/45R16 XL	-	90	V	7.8	213	7J	600	420AA	600	1323	340	50	BSW
	205/60R16 XL	-	96	H	7.8	209	6J	652	420AA	710	1565	340	50	BSW
	205/55R16 XL	-	94	V	7.8	214	6 1/2J	632	420AA	670	1477	340	50	BSW
	205/45R16 XL	-	87	W	7.8	206	7J	590	420AA	545	1201	340	50	BSW
	195/55R16 XL	-	91	V	7.8	201	6J	620	420AA	615	1356	340	50	BSW
	195/50R16 XL	-	88	V	7.8	201	6J	602	420AA	560	1235	340	50	BSW
	195/45R16 XL	-	84	V	7.8	195	6 1/2J	582	420AA	500	1102	340	50	BSW
15	215/65R15	-	96	H	7.8	221	6 1/2J	661	420AA	710	1565	300	44	BSW
	205/65R15	-	94	V	7.8	209	6J	647	420AA	670	1477	300	44	BSW
	195/65R15 XL	-	95	H	7.8	201	6J	635	420AA	690	1521	340	50	BSW
	195/65R15	-	91	H	7.8	201	6J	635	420AA	615	1356	300	44	BSW
	195/60R15	-	88	H	7.8	201	6J	615	420AA	560	1235	300	44	BSW
	195/55R15	-	85	V	7.8	201	6J	595	420AA	515	1135	300	44	BSW
	195/50R15	-	82	V	7.8	201	6J	577	420AA	475	1047	300	44	BSW
	185/65R15 XL	-	92	T	7.8	189	5 1/2J	621	420AA	630	1389	340	50	BSW
	185/65R15	-	88	H	7.8	189	5 1/2J	621	420AA	560	1235	300	44	BSW
	185/60R15 XL	-	88	H	7.8	189	5 1/2J	603	420AA	560	1235	340	50	BSW
	185/60R15	-	84	H	7.8	189	5 1/2J	603	420AA	500	1102	300	44	BSW
	185/55R15	-	82	V	7.8	194	6J	585	420AA	475	1047	300	44	BSW
	175/65R15 XL	-	88	T	7.6	177	5J	609	420AA	560	1235	340	50	BSW
	175/65R15	-	84	H	7.6	177	5J	609	420AA	500	1102	300	44	BSW
	175/60R15	-	81	H	7.6	177	5J	591	420AA	462	1019	300	44	BSW
	175/55R15	-	77	H	7.8	182	5 1/2J	573	420AA	412	908	300	44	BSW
14	185/70R14	-	88	H	7.8	189	5 1/2J	616	420AA	560	1235	300	44	BSW
	185/65R14	-	86	H	7.8	189	5 1/2J	596	420AA	530	1168	300	44	BSW
	185/60R14	-	82	H	7.8	189	5 1/2J	578	420AA	475	1047	300	44	BSW
	185/55R14	-	80	H	7.8	194	6J	560	420AA	450	992	300	44	BSW
	175/70R14 XL	-	88	T	7.6	177	5J	602	420AA	560	1235	340	50	BSW
	175/70R14	-	84	H	7.6	177	5J	602	420AA	500	1102	300	44	BSW
	175/65R14 XL	-	86	T	7.6	177	5J	584	420AA	530	1168	340	50	BSW
	175/65R14	-	82	H	7.6	177	5J	584	420AA	475	1047	300	44	BSW
	165/70R14	-	81	H	7.6	170	5J	588	420AA	462	1019	300	44	BSW
	165/65R14	-	79	H	7.6	170	5J	570	420AA	437	963	300	44	BSW
	165/60R14	-	75	H	7.6	170	5J	554	420AA	387	853	300	44	BSW
	155/65R14	-	75	H	7.6	157	4 1/2J	558	420AA	387	853	300	44	BSW
13	175/70R13	-	82	T	7.6	177	5.00B	576	420AA	475	1047	300	44	BSW
	175/65R13	-	80	T	7.6	177	5.00B	558	420AA	450	992	300	44	BSW
	165/70R13	-	79	T	7.6	170	5.00B	562	420AA	437	963	300	44	BSW
	155/80R13	-	79	T	7.6	157	4.50B	578	420AB	437	963	300	44	BSW
	155/70R13	-	75	T	7.6	157	4.50B	548	420AA	387	853	300	44	BSW
	155/65R13	-	73	T	7.6	157	4.50B	532	420AA	365	805	300	44	BSW

The labeling information is subject to change without notice.