

CATCHFORS A/T M+S



UTQG: 420AA



COMFORT



HIGH PERFORMANCE



SILENCE



DRAINAGE



Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.




The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.



The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.



Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

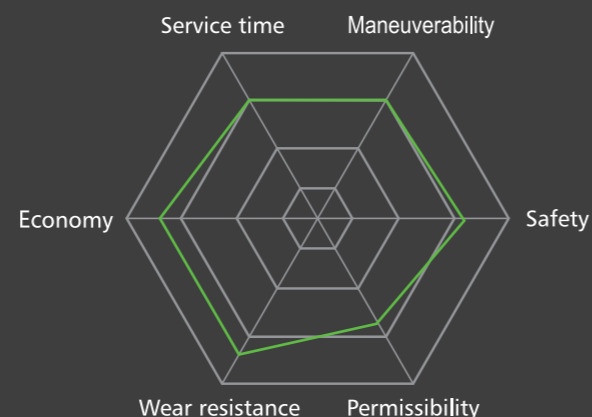

CATCHFORS A/T M+S



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	lbs	Kpa	Psi	
20 P275/60R20 XL	-	119	T	8.7	279	8J	838	500AB	1360	2998	340	50	BSW
P275/55R20 XL	-	117	T	8.7	284	8 1/2J	810	500AB	1285	2833	340	50	BSW
18 LT275/70R18	-	125/122	S	11.2	279	8J	843	-	1650/1500	3640/3305	550	80	BSW
LT275/65R18	-	123/120	S	11.2	279	8J	815	-	1550/1400	3415/3085	550	80	BSW
17 P275/65R17	-	115	T	9.2	279	8J	790	500AB	1215	2679	300	44	BSW
P265/70R17	-	115	T	9	272	8J	804	500AB	1215	2679	300	44	BSW
P265/70R17	-	113	T	9.2	272	8J	804	500AB	1150	2535	300	44	BSW
LT265/70R17	-	121/118	S	11.7	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
P265/65R17	-	110	T	8.7	272	8J	776	500AB	1060	2337	300	44	BSW
P265/65R17	-	112	T	8.7	272	8J	776	500AB	1120	2469	300	44	BSW
LT245/75R17	-	121/118	S	11.2	248	7J	800	-	1450/1320	3195/2910	550	80	BSW
P245/65R17	-	107	T	8.8	248	7J	750	500AB	975	2149	300	44	BSW
P255/65R17	-	110	T	8.7	260	7 1/2J	764	500AB	1060	2337	300	44	BSW
P235/65R17	-	104	T	8.8	240	7J	738	500AB	900	1984	300	44	BSW
16 225/70R17 XL	-	108	Q	8.7	228	6 1/2J	748	500AB	1000	2205	340	50	BSW
LT285/75R16	-	122/119	S	11.6	286	8J	834	-	1500/1360	3305/3000	450	65	BSW
P275/70R16	-	114	T	9.2	279	8J	792	500AB	1180	2601	300	44	BSW
LT265/75R16	-	123/120	S	11.7	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
P265/70R16	-	112	T	9.2	272	8J	778	500AB	1120	2469	300	44	BSW
P265/70R16	-	111	T	9.2	272	8J	778	500AB	1090	2403	300	44	BSW
P255/70R16	-	109	T	9.2	260	7 1/2J	764	500AB	1030	2271	300	44	BSW
P255/70R16	-	111	T	9.2	260	7 1/2J	764	500AB	1090	2403	300	44	BSW
LT245/75R16	-	120/116	S	11.2	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
P245/70R16 XL	-	111	S	8.8	248	7J	750	500AB	1090	2403	340	50	BSW
P245/70R16	-	107	T	8.8	248	7J	750	500AB	975	2149	300	44	BSW
P245/70R16	-	106	T	8.8	248	7J	750	500AB	950	2094	300	44	BSW
LT235/85R16	-	120/116	S	11.7	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
P235/70R16	-	104	T	8.8	240	7J	736	500AB	900	1984	300	44	BSW
P235/70R16	-	106	T	8.8	240	7J	736	500AB	950	2094	300	44	BSW
LT225/75R16	-	115/112	S	11.2	223	6J	744	-	1215/1120	2680/2470	550	80	BSW
P225/70R16	-	103	T	8.2	228	6 1/2J	722	500AB	875	1929	300	44	BSW
P225/70R16	-	101	T	8.2	228	6 1/2J	722	500AB	825	1819	300	44	BSW
LT215/85R16	-	115/112	S	10.9	216	6J	772	-	1215/1120	2680/2470	550	80	BSW
P215/70R16	-	100	T	8.2	221	6 1/2J	708	500AB	800	1764	300	44	BSW
P215/70R16	-	99	T	8.2	221	6 1/2J	708	500AB	775	1709	300	44	BSW
205R16C	-	110/108	S	8.2	208	6J	736	-	1060/1000	2335/2205	450	65	BSW
185/75R16C	-	104/102	S	8.1	184	5J	684	-	900/850	1985/1875	450	65	BSW
15 31x10.50R15LT	-	109	S	11.7	268	8 1/2J	775	-	1030	2270	350	51	BSW
P265/70R15	-	112	T	9.2	272	8J	753	500AB	1120	2469	300	44	BSW
255/70R15C	-	112/110	S	8.2	260	7 1/2J	739	-	1120/1060	2470/2335	375	55	BSW
245/75R15C	-	109/107	S	11.2	248	7J	749	-	1030/975	2270/2150	375	55	BSW
P235/75R15 XL	-	109	S	8.7	235	6 1/2J	733	500AB	1030	2271	340	50	BSW
LT235/75R15	-	104/101	S	11.2	235	6 1/2J	733	-	900/825	1985/1820	350	50	BSW
P225/75R15	-	102	T	8.2	223	6J	719	500AB	850	1874	300	44	BSW
P215/75R15	-	100	T	8.2	216	6J	703	500AB	800	1764	300	44	BSW
215/70R15C	-	109/107	R	8.2	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
215R15C	-	112/110	S	8.7	218	6J	725	-	1120/1060	2470/2337	450	65	BSW
P205/75R15	-	97	T	8.2	203	5 1/2J	689	500AB	725	1598	300	44	BSW

The labeling information is subject to change without notice.