

# COMFORT II M+S



## UTQG: 360AA — 380AA



ECONOMY



STABILITY



SILENCE



WET


### Comfortable silent performance

Adopt 5 frequency pattern block, virtual analysis and optimized permutation design, effectively reduce the pattern block noise resonance phenomenon, reduce product noise, improve driving comfort.



### Excellent wetland performance

Optimization of longitudinal/transverse groove design and the use of the best groove curve, improve the drainage performance of tires in wetlands and greatly improve the safety performance of tires.




### Extraordinary handling performance

The internal and external asymmetrical shoulder design is adopted to ensure wet performance while improving tire handling performance, bringing driving pleasure.



### Excellent wear resistance

The optimum sea-land ratio and optimized steel sheet design can prevent the stress concentration when the tire is running, so that all points of the tire are uniformly worn, and the wear performance is improved.

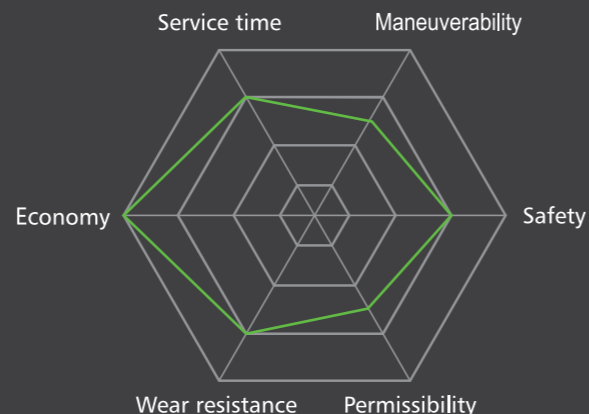

## COMFORT II M+S



D-C



D-B



B

Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description	
16	235/60R16	-	100	H	7.3	240	7.0J	688	380AA	800	1764	300	44	BSW
	225/60R16	-	98	H	7.3	228	6.5J	676	380AA	750	1653	300	44	BSW
	215/65R16	-	98	H	7.3	221	6.5J	686	380AA	750	1653	300	44	BSW
	215/60R16 XL	-	99	H	7.3	221	6.5J	664	380AA	775	1709	340	50	BSW
	215/60R16	-	95	V	7.3	221	6.5J	664	380AA	690	1521	300	44	BSW
	215/55ZR16 XL	-	97	W	7.3	226	7.0J	642	380AA	730	1609	340	50	BSW
	215/45ZR16 XL	-	90	W	7.8	213	7.0J	600	380AA	600	1323	340	50	BSW
	205/65R16	-	95	H	7.3	209	6.0J	672	380AA	690	1521	300	44	BSW
	205/60R16 XL	-	96	H	7.3	209	6.0J	652	380AA	710	1565	340	50	BSW
	205/60R16	-	92	V	7.3	209	6.0J	652	380AA	630	1389	300	44	BSW
	205/55ZR16 XL	-	94	W	7.3	214	6.5J	632	380AA	670	1477	340	50	BSW
	205/55R16	-	91	V	7.3	214	6.5J	632	380AA	615	1356	300	44	BSW
	195/60R16	-	89	H	7	201	6.0J	640	380AA	580	1279	300	44	BSW
	195/55R16 XL	-	91	V	7	201	6.0J	620	380AA	615	1356	340	50	BSW
	195/55R16	-	87	V	7	201	6.0J	620	380AA	545	1201	300	44	BSW
	195/50R16 XL	-	88	V	7	201	6.0J	602	380AA	560	1235	340	50	BSW
	195/45R16 XL	-	84	V	7	195	6.5J	582	380AA	500	1102	340	50	BSW
	185/60R16	-	86	H	6.7	189	5.5J	628	360AA	530	1168	300	44	BSW
	185/55R16 XL	-	87	V	7	194	6.0J	610	380AA	545	1201	340	50	BSW
	185/50R16	-	81	V	7	194	6.0J	592	380AA	462	1019	300	44	BSW
	175/50R16	-	77	V	6.7	182	5.5J	582	360AA	412	908	300	44	BSW
15	225/70R15	-	100	H	7	228	6.5J	697	380AA	800	1764	300	44	BSW
	215/70R15	-	98	H	7	221	6.5J	683	380AA	750	1653	300	44	BSW
	215/65R15	-	96	H	7.3	221	6.5J	661	380AA	710	1565	300	44	BSW
	205/70R15	-	96	H	7	209	6.0J	669	380AA	710	1565	300	44	BSW
	205/65R15	-	94	H	7.3	209	6.0J	647	380AA	670	1477	300	44	BSW
	205/65R15	-	94	V	7.3	209	6.0J	647	380AA	670	1477	300	44	BSW
	205/60R15	-	91	V	7.3	209	6.0J	627	380AA	615	1356	300	44	BSW
	205/55R15	-	88	V	7.3	214	6.5J	607	380AA	560	1235	300	44	BSW
	195/65R15 XL	-	95	H	7	201	6.0J	635	380AA	690	1521	340	50	BSW
	195/65R15	-	91	H	7	201	6.0J	635	380AA	615	1356	300	44	BSW
	195/65R15	-	91	V	7	201	6.0J	635	380AA	615	1356	300	44	BSW
	195/60R15	-	88	H	7	201	6.0J	615	380AA	560	1235	300	44	BSW
	195/60R15	-	88	V	7	201	6.0J	615	360AA	560	1235	300	44	BSW
	195/55R15	-	85	V	7	201	6.0J	595	380AA	515	1135	300	44	BSW
	195/50R15	-	82	V	7	201	6.0J	577	380AA	475	1047	300	44	BSW
	195/45R15 XL	-	82	V	7	195	6.5J	557	380AA	475	1047	340	50	BSW
	185/65R15 XL	-	92	T	6.7	189	5.5J	621	360AA	630	1389	340	50	BSW
	185/65R15	-	88	H	6.7	189	5.5J	621	360AA	560	1235	300	44	BSW
	185/60R15 XL	-	88	H	6.7	189	5.5J	603	360AA	560	1235	340	50	BSW
	185/60R15	-	84	H	6.7	189	5.5J	603	360AA	500	1102	300	44	BSW
	185/55R15	-	82	V	7	194	6J	585	380AA	475	1047	300	44	BSW
	185/45R15	-	75	V	7	183	6.0J	547	380AA	387	853	300	44	BSW
	175/65R15	-	84	H	6.7	177	5.0J	609	360AA	500	1102	300	44	BSW
	175/60R15	-	81	H	6.7	177	5.0J	591	360AA	462	1019	300	44	BSW
	175/55R15	-	77	H	6.7	182	5.5J	573	360AA	412	908	300	44	BSW
	175/50R15	-	75	H	6.7	182	5.5J	557	360AA	387	853	300	44	BSW
	165/65R15	-	81	H	6.7	170	5.0J	595	360AA	462	1019	300	44	BSW
	165/60R15	-	77	H	6.7	170	5.0J	579	360AA	412	908	300	44	BSW
	165/50R15	-	72	V	6.6	170	5.0J	547	360AA	355	783	300	44	BSW
	155/60R15	-	74	T	6.7	157	4.5J	567	360AA	375	827	300	44	BSW
	145/65R15	-	72	T	6.7	150	4.5J	569	360AA	355	783	300	44	BSW

The labeling information is subject to change without notice.

# COMFORT II M+S



## UTQG: 360AA — 380AA



ECONOMY



STABILITY



SILENCE



WET

### Comfortable silent performance

Adopt 5 frequency pattern block, virtual analysis and optimized permutation design, effectively reduce the pattern block noise resonance phenomenon, reduce product noise, improve driving comfort.

### Excellent wetland performance


Optimization of longitudinal/transverse groove design and the use of the best groove curve, improve the drainage performance of tires in wetlands and greatly improve the safety performance of tires.

### Extraordinary handling performance

The internal and external asymmetrical shoulder design is adopted to ensure wet performance while improving tire handling performance, bringing driving pleasure.

### Excellent wear resistance

The optimum sea-land ratio and optimized steel sheet design can prevent the stress concentration when the tire is running, so that all points of the tire are uniformly worn, and the wear performance is improved.

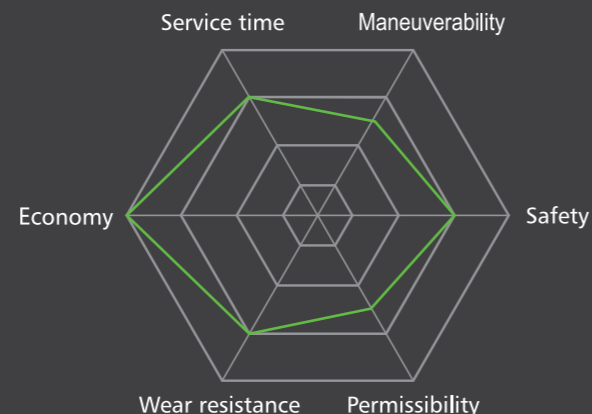

## COMFORT II M+S



D-C



D-B



B

	Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
14	215/70R14	-	96	H	7	221	6.5J	658	380AA	710	1565	300	44	BSW
	205/70R14	-	95	H	7	209	6.0J	644	380AA	690	1521	300	44	BSW
	205/60R14	-	88	H	7.3	209	6.0J	602	380AA	560	1235	300	44	BSW
	195/70R14	-	91	H	7	201	6.0J	630	380AA	615	1356	300	44	BSW
	195/65R14	-	89	H	7	201	6.0J	610	380AA	580	1279	300	44	BSW
	195/60R14	-	86	H	7	201	6.0J	590	380AA	530	1168	300	44	BSW
	185/70R14	-	88	H	6.7	189	5.5J	616	360AA	560	1235	300	44	BSW
	185/65R14	-	86	H	6.7	189	5.5J	596	360AA	530	1168	300	44	BSW
	185/60R14	-	82	H	6.7	189	5.5J	578	360AA	475	1047	300	44	BSW
	185/55R14	-	80	H	7	194	6.0J	560	380AA	450	992	300	44	BSW
	185/50R14	-	77	V	7	194	6.0J	542	380AA	412	908	300	44	BSW
	175/75R14	-	86	T	6.6	177	5.0J	618	360AA	530	1168	300	44	BSW
	175/70R14 XL	-	88	T	6.7	177	5.0J	602	360AA	560	1235	340	50	BSW
	175/70R14	-	84	H	6.7	177	5.0J	602	360AA	500	1102	300	44	BSW
	175/70R14	-	84	T	6.7	177	5.0J	602	360AA	500	1102	300	44	BSW
	175/65R14 XL	-	86	T	6.7	177	5.0J	584	360AA	530	1168	340	50	BSW
	175/65R14	-	82	T	6.7	177	5.0J	584	360AA	475	1047	300	44	BSW
	175/65R14	-	82	H	6.7	177	5.0J	584	360AA	475	1047	300	44	BSW
	175/60R14	-	79	H	6.6	177	5.0J	566	360AA	437	963	300	44	BSW
	165/70R14 XL	-	85	T	6.7	170	5.0J	588	360AA	515	1135	340	50	BSW
165/70R14	-	81	H	6.7	170	5.0J	588	360AA	462	1019	300	44	BSW	
165/70R14	-	81	T	6.7	170	5.0J	588	360AA	462	1019	300	44	BSW	
165/65R14	-	79	T	6.7	170	5.0J	570	360AA	437	963	300	44	BSW	
165/65R14	-	79	H	6.7	170	5.0J	570	360AA	437	963	300	44	BSW	
165/55R14	-	72	H	6.6	170	5.0J	538	360AA	355	783	300	44	BSW	
165/60R14	-	75	H	6.7	170	5.0J	554	360AA	387	853	300	44	BSW	
155/65R14	-	75	H	6.7	157	4.5J	558	360AA	387	853	300	44	BSW	
13	185/70R13	-	86	T	6.7	189	5.5J	590	360AA	530	1168	300	44	BSW
	175/75R13	-	84	T	6.6	177	5.0J	592	360AA	500	1102	300	44	BSW
	175/70R13	-	82	T	6.7	177	5.0J	576	360AA	475	1047	300	44	BSW
	175/65R13	-	80	T	6.7	177	5.0J	558	360AA	450	992	300	44	BSW
	175/60R13	-	77	H	6.7	177	5.0J	540	360AA	412	908	300	44	BSW
	165/80R13	-	83	T	6.7	165	4.5J	594	360AA	487	1074	300	44	BSW
	165/70R13	-	79	T	6.7	170	5.0J	562	360AA	437	963	300	44	BSW
	165/65R13	-	77	T	6.7	170	5.0J	544	360AA	412	908	300	44	BSW
	155/80R13	-	79	T	6.7	157	4.5J	578	360AA	437	963	300	44	BSW
	155/70R13	-	75	T	6.7	157	4.5J	548	360AA	387	853	300	44	BSW
	155/65R13	-	73	T	6.7	157	4.5J	532	360AA	365	805	300	44	BSW
	145/80R13	-	75	T	6.7	145	4.0J	562	360AA	387	853	300	44	BSW
12	145/70R13	-	71	T	6.7	150	4.5J	534	360AA	345	761	300	44	BSW
	175/70R12	-	80	T	6.7	177	5.0J	551	360AA	450	992	300	44	BSW
	165/70R12	-	77	T	6.7	170	5.0J	537	360AA	412	908	300	44	BSW
	155/70R12	-	73	T	6.7	157	4.5J	523	360AA	365	805	300	44	BSW
145/70R12	-	69	T	6.7	150	4.5J	509	360AA	325	716	300	44	BSW	

The labeling information is subject to change without notice.