

WARRIOR R/T LAND WARRIOR-R/T M+S



UTQG: 600AB



BRAKING



4 SEASON



STABILITY



DRAINAGE



STAGGERED SHOULDER LUGS:
Provides traction in off-road environments.




Slingstone structure:
Protect the bottom of groove from sharp stone.



STEP BLOCK EDGE:
Step block edge provide additional biting edges for more traction.



Shoulder and block design:
Shoulder grooves are arranged in alternating widths and lengths to clear mud and maintain traction. Irregular block provide more traction on different road condition.

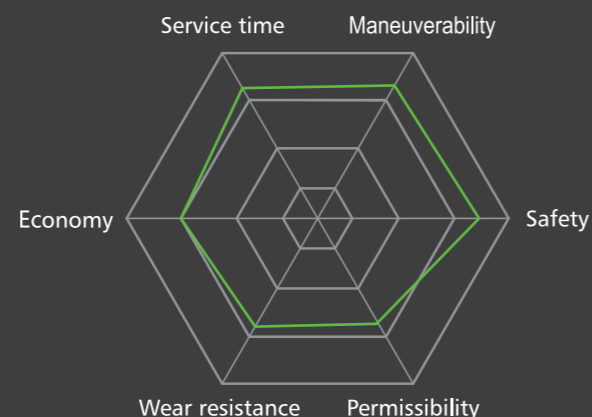

WARRIOR R/T M+S

	Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
20	LT285/50R20(POR)	10PR	119/116	Q	11.0	297	9J	794	-	1360/1250	3000/2755	550	80	BSW
	LT275/55R20(POR)	10PR	120/117	Q	11.0	284	8 1/2J	810	-	1400/1285	3085/2835	550	80	BSW
19	LT265/60R20(POR)	10PR	121/118	Q	11.0	272	8J	826	-	1450/1320	3195/2910	550	80	BSW
	LT265/50R20(POR)	10PR	115/112	Q	11.0	277	8 1/2J	774	-	1215/1120	2680/2470	550	80	BSW
18	255/55R19 XL(POR)	-	111	Q	11.0	265	8J	763	-	1090	2403	340	50	BSW
	35x12.50R18LT	10PR	123	Q	13.0	318	10J	883	-	1550	3415	450	65	BSW
	33x12.50R18LT(POR)	10PR	118	Q	13.0	318	10J	826	-	1320	2910	450	65	BSW
	LT275/65R18	10PR	123/120	Q	11.0	279	8J	815	-	1550/1400	3415/3085	550	80	BSW
17	LT265/70R18	10PR	124/121	Q	11.0	272	8J	829	-	1600/1450	3525/3195	550	80	BSW
	LT265/65R18	10PR	122/119	Q	11.0	272	8J	801	-	1500/1360	3305/3000	550	80	BSW
	LT255/55R18(POR)	8PR	109/105	Q	11.0	265	8J	737	-	1030/925	2270/2040	450	65	BSW
	33x12.50R17LT(POR)	10PR	120	Q	13.0	318	10J	826	-	1400	3085	450	65	BSW
	LT315/70R17(POR)	10PR	121/118	Q	11.0	323	9 1/2J	874	-	1450/1320	3195/2910	450	65	BSW
	LT285/70R17(POR)	10PR	121/118	Q	11.0	292	8 1/2J	832	-	1450/1320	3195/2910	550	80	BSW
	LT265/70R17(POR)	10PR	121/118	Q	11.0	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
	LT255/65R17(POR)	8PR	114/110	Q	11.0	260	7 1/2J	764	-	1180/1060	2600/2335	450	65	BSW
	LT245/70R17(POR)	10PR	119/116	Q	11.0	248	7J	776	-	1360/1250	3000/2755	550	80	BSW
	LT245/65R17(POR)	10PR	117/114	Q	11.0	248	7J	750	-	1285/1180	2835/2600	550	80	BSW
16	LT225/70R17(POR)	8PR	110/107	Q	11.0	228	6 1/2J	748	-	1060/975	2335/2150	450	65	BSW
	LT225/65R17(POR)	8PR	107/103	Q	11.0	228	6 1/2J	724	-	975/875	2150/1930	450	65	BSW
	LT305/70R16	10PR	124/121	Q	11.0	311	9J	834	-	1600/1450	3525/3195	450	65	BSW
	LT285/75R16	10PR	126/123	Q	11.0	286	8J	834	-	1700/1550	3750/3415	550	80	BSW
	LT275/70R16(POR)	8PR	119/116	Q	11.0	279	8J	792	-	1360/1250	3000/2755	450	65	BSW
	LT265/75R16	10PR	123/120	Q	11.0	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
	LT265/70R16(POR)	10PR	121/118	Q	11.0	272	8J	778	-	1450/1320	3195/2910	550	80	BSW
	LT255/70R16(POR)	10PR	120/117	Q	11.0	260	7 1/2J	764	-	1400/1285	3085/2835	550	80	BSW
	LT245/75R16(POR)	10PR	120/116	Q	11.0	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
	LT245/70R16(POR)	8PR	113/110	Q	11.0	248	7J	750	-	1150/1060	2535/2335	450	65	BSW
15	LT235/85R16(POR)	10PR	120/116	Q	11.0	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
	LT235/75R15(POR)	8PR	110/107	Q	11.0	235	6 1/2J	733	-	1060/975	2335/2150	450	65	BSW
	LT225/75R16(POR)	10PR	115/112	Q	11.0	223	6J	744	-	1215/1120	2680/2470	550	80	BSW
	LT215/70R16(POR)	6PR	100/97	Q	11.0	221	6 1/2J	708	-	800/730	1765/1610	350	50	BSW
	31x10.50R15LT(POR)	6PR	109	Q	13.0	268	8 1/2J	775	-	1030	2270	350	50	BSW

The labeling information is subject to change without notice.

LAND WARRIOR-R/T M+S

	Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lBS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
22	33x12.50R22LT	10PR	109	Q	13.1	318	10.0J	826	-	1030	2270	450	65	BSW
20	35x12.50R22LT	10PR	117	Q	13.1	318	10.0J	877	-	1285	2835	450	65	BSW
	33x12.50R20LT	10PR	114	Q	13.1	318	10.0J	826	-	1180	2600	450	65	BSW
18	35x12.50R20LT	10PR	121	Q	13.1	318	10.0J	877	-	1450	3195	450	65	BSW
	LT265/60R18	10PR	119/116	S	11	272	8J	775	-	1360/1250	3000/2755	550	80	OWL
17	LT265/65R17	10PR	120/117	S	11	272	8J	776	-	1400/1285	3085/2835	550	80	OWL

The labeling information is subject to change without notice.