

MILE max M+S



STABILITY



SILENCE



OIL



WET



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all of road condition.




Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.



Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.



Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage

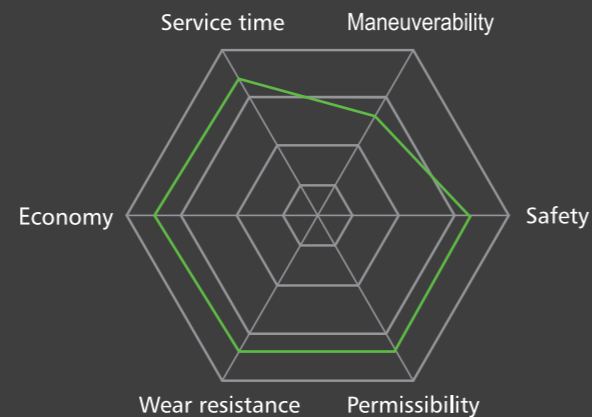

MILE max M+S



Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	lbs	Kpa	Psi	
16 235/65R16C	8PR	115/113	R	10	240	7J	712	-	1215/1150	2680/2535	475	69	BSW
225/65R16C	8PR	112/110	T	8.7	228	6 1/2J	698	-	1120/1060	2470/2335	475	69	BSW
215/75R16C	8PR	113/111	R	8.5	216	6J	728	-	1150/1090	2535/2405	475	69	BSW
215/65R16C	8PR	109/107	T	8.7	221	6 1/2J	686	-	1030/975	2270/2150	475	69	BSW
205/75R16C	8PR	110/108	R	8.5	203	5 1/2J	714	-	1060/1000	2335/2205	475	69	BSW
205/65R16C	8PR	101/98	T	8.7	209	6J	672	-	825/750	1820/1655	450	65	BSW
205/65R16C	8PR	107/105	T	8.7	209	6J	672	-	975/925	2150/2040	475	69	BSW
195/75R16C	8PR	107/105	R	8.2	196	5 1/2J	698	-	975/925	2150/2040	475	69	BSW
195/75R16C	8PR	102/99	R	8.8	196	5 1/2J	698	-	850/775	1875/1710	450	65	BSW
195/65R16C	8PR	104/102	R	8.4	201	6J	660	-	900/850	1985/1875	475	69	BSW
195/65R16C	8PR	99/96	R	8.4	201	6J	660	-	775/710	1710/1565	450	65	BSW
185/75R16C	8PR	104/102	R	8.1	184	5J	684	-	900/850	1985/1875	475	69	BSW
185/75R16C	8PR	100/97	R	8.1	184	5J	684	-	800/730	1765/1610	450	65	BSW
175/75R16C	8PR	101/99	R	7.8	177	5J	668	-	825/775	1820/1710	475	69	BSW
15 225/70R15C	8PR	112/110	R	8.7	228	6 1/2J	697	-	1120/1060	2470/2335	450	65	BSW
215/70R15C	8PR	109/107	R	8.5	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
215/70R15C	8PR	104/101	R	8.5	221	6 1/2J	683	-	900/825	1985/1820	450	65	BSW
215/65R15C	6PR	104/102	R	8.5	221	6 1/2J	661	-	900/850	1985/1875	375	55	BSW
205/70R15C	8PR	106/104	R	8.5	209	6J	669	-	950/900	2095/1985	450	65	BSW
195/70R15C	8PR	104/102	R	9.2	201	6J	655	-	900/850	1985/1875	450	65	BSW
195/70R15C	8PR	99/96	R	9.2	201	6J	655	-	775/710	1710/1565	450	65	BSW
14 195R15C	8PR	106/104	R	8.2	196	5 1/2J	693	-	950/900	2095/1985	450	65	BSW
205R14LT	8PR	107/105	R	8.2	208	6J	684	-	975/925	2150/2040	450	65	BSW
205R14C	8PR	109/107	R	8.2	208	6J	686	-	1030/975	2270/2150	450	65	BSW
195R14C	8PR	106/104	R	8.2	198	5 1/2J	666	-	950/900	2095/1985	450	65	BSW
185R14C	8PR	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
175/75R14LT	8PR	94/91	R	7.8	177	5J	618	-	670/615	1475/1355	450	65	BSW
175/70R14C	8PR	95/93	S	7.8	177	5J	602	-	690/650	1520/1435	375	55	BSW
175/70R14C	8PR	93/90	R	7.8	177	5J	602	-	650/600	1435/1325	450	65	BSW
175/65R14C	6PR	90/88	T	8.2	177	5J	584	-	600/560	1325/1235	375	55	BSW
175R14LT	8PR	99/97	R	7.8	177	5J	636	-	775/730	1710/1610	450	65	BSW
175R14C	8PR	99/98	R	7.8	178	5J	634	-	775/750	1710/1655	450	65	BSW
165/70R14C	8PR	90/87	R	7.8	170	5J	588	-	600/545	1325/1200	450	65	BSW
165/70R14C	6PR	89/87	R	7.8	170	5J	588	-	580/545	1280/1200	375	55	BSW
13 165R14LT	6PR	91/90	R	7.8	165	4 1/2J	620	-	615/600	1355/1325	350	51	BSW
175R13LT	6PR	92/90	R	7.8	177	5.00B	610	-	630/600	1390/1325	350	51	BSW
165/70R13C	8PR	88/85	R	7.8	170	5.00B	562	-	560/515	1235/1135	450	65	BSW
165/70R13C	6PR	88/86	S	7.8	170	5.00B	562	-	560/530	1235/1170	375	55	BSW
165R13C	8PR	94/93	R	7.8	167	4.50B	596	-	670/650	1475/1435	450	65	BSW
165R13C	6PR	91/89	R	7.8	167	4.50B	596	-	615/580	1355/1280	375	55	BSW
155R13C	8PR	90/88	Q	7.8	157	4.50B	578	-	600/560	1325/1235	450	65	BSW
155R13C	6PR	85/83	Q	7.8	157	4.50B	578	-	515/487	1135/1075	350	50	BSW
155R12C	8PR	88/86	Q	7.8	157	4.50B	550	-	560/530	1235/1170	450	65	BSW
145R12C	8PR	86/84	Q	7.8	147	4.00B	542	-	530/500	1170/1100	450	65	BSW

The labeling information is subject to change without notice.