PERFORMAX M+S

UTQG:420AA

COMFORT | HIGH PERFORMANCE | SILENCE | DRAINAGE

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

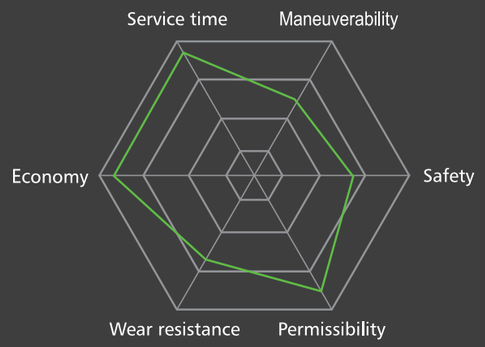

PERFORMAX M+S

C-B | C-B | B

	Size	PR	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load 1BS	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Descriptiom
18	285/60R18	-	116	H	8.3	292	8 1/2J	799	420AA	1250	2756	300	44	BSW
	275/65R18	-	116	H	8.2	279	8J	815	420AA	1250	2756	300	44	BSW
	275/60R18	-	113	H	8.3	179	8J	787	420AA	1150	2535	300	44	BSW
	265/60R18	-	110	T	8.3	272	8J	775	420AA	1060	2337	300	44	BSW
	265/60R18	-	110	H	8.3	272	8J	775	420AA	1060	2337	300	44	BSW
	255/70R18	-	113	H	8.2	260	7 1/2J	815	420AA	1150	2535	300	44	BSW
	245/60R18	-	105	H	8.2	248	7J	751	420AA	925	2039	300	44	BSW
	235/65R18 XL	-	110	H	8.2	240	7J	763	420AA	1060	2337	340	50	BSW
	235/60R18 XL	-	107	H	8.3	240	7J	739	420AA	975	2149	340	50	BSW
	235/60R18 XL	-	107	H	8.3	240	7J	739	420AA	975	2149	340	50	BSW
	235/55R18 XL	-	104	H	8.3	245	7 1/2J	715	420AA	900	1984	340	50	BSW
	225/60R18 XL	-	104	H	8.3	228	6 1/2J	727	420AA	900	1984	340	50	BSW
	225/60R18 XL	-	104	H	8.3	228	6 1/2J	727	420AA	900	1984	340	50	BSW
	225/55R18	-	98	H	8.3	233	7J	705	420AA	750	1653	300	44	BSW
17	285/65R17	-	116	H	8.3	292	8 1/2J	802	420AA	1250	2756	300	44	BSW
	275/65R17	-	115	H	8.3	279	8J	790	420AA	1215	2679	300	44	BSW
	LT265/70R17	-	121/118	S	8.3	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
	265/70R17	-	115	H	8.3	272	8J	804	420AA	1215	2679	300	44	BSW
	265/65R17	-	112	H	8.3	272	8J	776	420AA	1120	2469	300	44	BSW
	255/65R17	-	110	H	8.3	260	7 1/2J	764	420AA	1060	2337	300	44	BSW
	LT245/75R17	-	121/118	S	8.3	248	7J	800	-	1450/1320	3195/2910	550	80	BSW
	245/65R17 XL	-	111	H	8.3	248	7J	750	420AA	1090	2403	340	50	BSW
	245/65R17	-	107	H	8.3	248	7J	750	420AA	975	2149	300	44	BSW
	235/65R17	-	104	H	8.3	240	7J	738	420AA	900	1984	300	44	BSW
	235/60R17 XL	-	106	H	8.3	240	7J	714	420AA	950	2094	340	50	BSW
	235/60R17	-	102	H	8.3	240	7J	714	420AA	850	1874	300	44	BSW
	225/65R17	-	102	H	8.3	228	6 1/2J	724	420AA	850	1874	300	44	BSW
	225/65R17	-	102	H	8.3	228	6 1/2J	724	420AA	850	1874	300	44	BSW
	225/60R17	-	99	H	8.3	228	6 1/2J	702	420AA	775	1709	300	44	BSW
	225/60R17	-	99	H	8.3	228	6 1/2J	702	420AA	775	1709	300	44	BSW
	215/65R17	-	99	H	8.3	221	6 1/2J	712	420AA	775	1709	300	44	BSW
	215/60R17	-	96	H	8.3	221	6 1/2J	690	420AA	710	1565	300	44	BSW
	215/60R17	-	96	H	8.3	221	6 1/2J	690	420AA	710	1565	300	44	BSW
16	275/70R16	-	114	H	8.3	279	8J	792	420AA	1180	2601	300	44	BSW
	LT265/75R16	-	123/120	S	8.3	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
	265/70R16	-	112	H	8.3	272	8J	778	420AA	1120	2469	300	44	BSW
	255/70R16	-	111	H	8.3	260	7 1/2J	764	420AA	1090	2403	300	44	BSW
	255/65R16	-	109	H	8.3	260	7 1/2J	738	420AA	1030	2271	300	44	BSW
	LT245/75R16	-	120/116	S	8.3	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
	245/70R16 XL	-	111	H	8.3	248	7J	750	420AA	1090	2403	340	50	BSW
	245/70R16	-	107	H	8.3	248	7J	750	420AA	975	2149	300	44	BSW
	LT235/85R16	-	120/116	S	8.3	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
	235/70R16	-	106	H	8.3	240	7J	736	420AA	950	2094	300	44	BSW
	LT225/75R16	-	115/112	S	8.3	223	6J	744	-	1215/1120	2680/2470	550	80	BSW
	225/70R16 XL	-	107	H	8.3	228	6 1/2J	722	420AA	975	2149	340	50	BSW
	225/70R16	-	103	T	8.3	228	6 1/2J	722	420AA	875	1929	300	44	BSW
	215/70R16	-	100	H	8.3	221	6 1/2J	708	420AA	800	1764	300	44	BSW
	215/70R16	-	100	T	8.3	221	6 1/2J	708	420AA	800	1764	300	44	BSW

The labeling information is subject to change without notice.