

HIFLY **TIRES**

Truck and Bus Tire Catalog

HIFLY **TIRES**

Shandong Changfeng Tyres Co., Ltd.

Dawang Economic Development Zone, Dongying, Shandong, 257335, China

Tel: +86 546 6893270 Fax: +86 546 6893669

Website: <http://www.changfengtires.com>

E-mail: sales@changfengtires.com





Shandong Changfeng Tyres Co., Ltd.

Company Profile:

HIFLY Tires, enjoying high popularity in both domestic and international markets, is one of the major brands developed by Shandong Changfeng Tyres Co., Ltd.

Shandong Changfeng Tyres Co., Ltd., one of the major tire manufacturers in China, was established in 1995 and covers an area of 2 million square meters, with total assets of over 5 billion RMB and more than 10,000 employees. The company owns 6 plants in Dongying and Linyi city, Shandong province, China. Three plants are for TBR products with annual production capacity of 6 million tires, another three plants are for PCR products with annual production capacity of 30 million tires.

Changfeng specializes in manufacturing radial tires which are widely used in passenger car, SUV, light truck, truck and bus etc., and in all seasons with excellent performance, which are well-reputed all over the world.

Changfeng takes pride in its experienced R&D team and advanced testing facilities, which assure the excellent and stable quality of its products. Many of Changfeng's manufacturing equipments are imported from Europe, United States and Japan.

Changfeng has built a strong quality assurance system and its products are accredited with certificates of ISO9001, IATF16949, DOT, ECE, GCC, INMETRO, CCC, BIS, SNI, SONCAP, etc.



We export to more than 120 countries in the world

HIFLY
RADIAL
PRTTERN
RANGE

POSITION

ROAD


LONG & REGIONAL HAUL



ALL POSITION



STEER/TRAILER

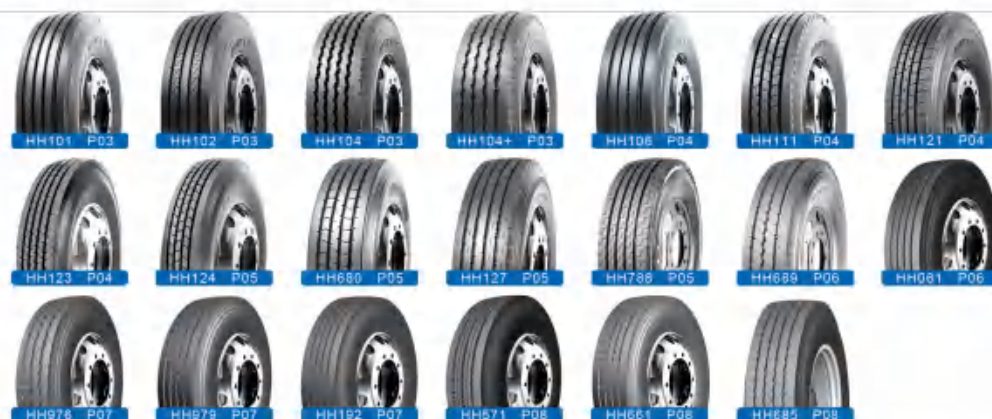

DRIVE



TRAILER



MIXED SERVICE



OFF ROAD





ALL POSITION



HH105

Features

- Three groove design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide outstanding wet performance
- Provide outstanding resistance to abrasion
- Provide excellent heat dissipation



HH117

Features

- Three zigzag grooves design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide excellent wet performance
- Provide outstanding resistance to abrasion
- Provide outstanding heat dissipation



HH599+

Features

- Four circumferential grooves
- Ladder arrangement design of longitudinal pattern
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Reduce irregular wear greatly
- Provide outstanding resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH599

Features

- Four circumferential grooves
- Ladder arrangement design of longitudinal pattern
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Reduce irregular wear greatly
- Provide outstanding resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Long
Haul



Regional
Haul



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

Size	HH105	HH117	HH599+	HH599
7.50R16				125/121 L
9.00R20	144/142 K			
10.00R20	149/146 K			
11.00R20	152/149 K			
12.00R20	156/153 K			
12.00R24	160/157 K			
12R22.5		152/149 L		
			152/149 J	152/149 K



STEER/TRAILER



***HH101**

Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation



***HH102**

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance



***HH104**

Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



***HH104+**

Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

Size	HH101	HH102	HH104	HH104+	Remarks
9.00R20			144/142 K		The symbol of *** represents patterns applicable for all position bus.
10.00R20			149/146 K		
11.00R20			152/149 K		
12.00R20			156/153 K		
11R22.5	148/145 M	148/145 M	148/145 M		
12R22.5	152/149 M	152/149 M			
13R22.5		156/152 L(154/151 M)			
215/75R17.5		135/133 J			
255/70R22.5		140/137 L			
295/80R22.5		152/149 M			
315/70R22.5		154/150 L(152/148 M)			156/152 L(154/151 M)
315/80R22.5		156/152 L(154/151 M)			



STEER/TRAILER



HH106

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Deliver lower rolling resistance



HH111

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HH121

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



HH123

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

Size	HH106	HH111	HH121	HH123
9.5R17.5			143/141 J	
11.00R20			152/149 K	152/149 K
11R22.5		146/143 L		
11R24.5		146/143 M		
11R24.5		149/146 L		
215/75R17.5		135/133 J		
235/75R17.5		143/141 J		
225/70R19.5		128/126 L		
245/70R19.5		135/133 L		
255/70R22.5		140/137 L		
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M		152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5			156/152 L(154/151 M)	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



STEER/TRAILER



HH124

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HH680

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HH127

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HH788

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

Size	HH124	HH680	HH127	HH788
7.50R16LT			125/121 L	
295/80R22.5				152/149 M
315/80R22.5	156/152 L(154/151 M)	156/152 L(154/151 M)		



STEER/TRAILER



HH689

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HH061

Features

- Optimized ratio of tread block
- Specific tread compound formula for regional and long haul application
- Deepen the pattern grooves and widen tire crown design
- 4 circumferential groove design

Benefits

- Excellent grounding contact shape for improved wear performance Provide good wear life
- Effectively improve the handling stability and wear resistance
- Optimize tire shoulder design to improve crown burst performance
- Reduce rolling resistance, provide good straight-line driving performance

Size	HH689	HH061
12.00R24	160/157 K	
12R22.5		152/149 L



STEER/TRAILER



HH976

Features

- Optimized ratio of tread block
- Specific tread compound formula for regional and long haul application
- Stone rejectors in grooves
- 3 tortuous longitudinal groove design

Benefits

- Improve uneven wear
- Provide good wear life
- Provide resistance to stone drilling and protecting the bottom of the grooves
- All position with strong applicability



HH979

Features

- Stone rejectors in grooves
- Wide tire shoulder
- Straight narrow grooves design
- Wide longitudinal groove pattern design

Benefits

- Provide resistance to stone drilling to avoid grooves cracks
- Improve uneven wear
- Provide excellent water drainage performance
- Provide good water drainage performance and stable handling on wet road



HH192

Features

- Optimized ratio of tread block
- Specific tread compound formula for regional and long haul application
- Deepen the pattern grooves and widen tire crown design
- 4 circumferential groove design

Benefits

- Excellent grounding contact shape for improved wear performance Provide good wear life
- Effectively improve the handling stability and wear resistance
- Optimize tire shoulder design to improve crown burst performance
- Reduce rolling resistance, provide good straight-line driving performance

Size

12R22.5

HH976

152/149 L

HH979

152/149 L

HH192

152/149 L



STEER/TRAILER



HH571

Features

- Optimized ratio of tread block
- Specific tread compound formula for regional and long haul application
- Stone rejectors in grooves
- 3 tortuous longitudinal groove design

Benefits

- Improve uneven wear
- Provide good wear life
- Provide resistance to stone drilling and protecting the bottom of the grooves
- All position with strong applicability



HH661

Features

- Stone rejectors in grooves
- Wide tire shoulder
- Straight narrow grooves design
- Wide longitudinal groove pattern design

Benefits

- Provide resistance to stone drilling to avoid grooves cracks
- Improve uneven wear
- Provide excellent water drainage performance
- Provide good water drainage performance and stable handling on wet road



HH685

Features

- Stone rejectors in grooves
- Wide tire shoulder
- Straight narrow grooves design
- Wide longitudinal groove pattern design

Benefits

- Provide resistance to stone drilling to avoid grooves cracks
- Improve uneven wear
- Provide excellent water drainage performance
- Provide good water drainage performance and stable handling on wet road

Size

12R22.5
295/80R22.5

HH571

152/149 L

HH661

152/149 L

HH685

152/149 M



DRIVE



HH122

Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion



HH368

Features

- Special tread compound
- Four circumferential grooves
- Deeper tread depth design
- Block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Improved mileage performance
- Provide excellent driving and braking force



HH309

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH310

Features

- Four circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

Size	HH122	HH368	HH309	HH310
10.00R20		149/146 K		
12.00R24	160/157 K			160/157 K
11R22.5			148/145 M	
12R22.5			152/149 M	
13R22.5			156/152 L(154/151 M)	
215/75R17.5			135/133 J	
235/75R17.5			143/141 J	
295/80R22.5		152/149 M	152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5	156/152 L(154/151 M)		156/152 L(154/151 M)	



DRIVE



HH312

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HH308A

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance




HH505

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HH323

Features

- Block pattern design
- Open shoulder design
- Special tread compound

Benefits

- Provide excellent traction
- Improved heat dissipation to increase tire life
- Provide mileage performance

Size	HH312	HH308A	HH505	HH323
9.00R20		144/142 K		
10.00R20		149/146 K	149/146 D	
11R22.5	146/143 L	148/145 M		146/143 L
12R22.5	152/149 M			
11R24.5	146/143 M			146/143 M
11R24.5	149/146 L			149/146 L
295/75R22.5	144/141 M			144/141 M
295/75R22.5	146/143 L			146/143 L
315/70R22.5		154/150 L(152/148 M)		
315/80R22.5		156/152 L(154/151 M)		
285/75R24.5	144/141 M			144/141 M
285/75R24.5	147/144 L			147/144 L



DRIVE



HH326

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH328

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HH331

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HH616

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH326	HH328	HH331	HH616
9.00R20				144/142 K
10.00R20				149/146 K
12.00R20				156/153 K
295/80R22.5	152/149 M			
315/70R22.5	154/150 L(152/148 M)			
315/80R22.5	156/152 L(154/151 M)	156/152 L(154/151 M)	156/152 L(154/151 M)	



DRIVE



HH626

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HH327

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HH308A+


Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

Size	HH626	HH308A+	HH327
10.00R20	149/146 K		
12R22.5		152/149 M	
315/80R22.5			156/152 L(154/151 M)



DRIVE



HH051

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH081

Features

- Optimized ratio of tread block
- Deepened pattern groove, Specific tread compound formula for regional and long haul application
- Multiple angle groove wall design
- 4-ply belt design
- 3 tortuous longitudinal groove design

Benefits

- Shape for improved wear performance
- Provide good wear life
- Good self-cleaning performance, protecting the bottom of the grooves
- Promote uniform wear
- All position with strong applicability



HH565

Features

- Optimized ratio of tread block
- Deepened pattern groove, Specific tread compound formula for regional and long haul application
- Multiple angle groove wall design
- 4-ply belt design
- 3 tortuous longitudinal groove design

Benefits

- Shape for improved wear performance
- Provide good wear life
- Good self-cleaning performance, protecting the bottom of the grooves
- Promote uniform wear
- All position with strong applicability

Size	HH051	HH081	HH565
12R22.5	152/149 K	152/149 L	152/149 L



DRIVE



HH391

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



HH533

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HH538

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HH806

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation

Size	HH391	HH533	HH538	HH806
12.00R20	156/153 J			
295/80R22.5		152/149 M	152/149 M	152/149 M
315/70R22.5		156/150L(154/150M)	156/150L(154/150M)	
315/80R22.5		156/152L(154/151M)		



TRAILER



HH107

Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion



HH118

Features

- Four circumferential grooves
- Special groove design
- Curved lug design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Deliver excellent driving and braking force



HH126

Features

- Four circumferential groove designs
- Reduced tire weight

Benefits

- Improved antiskid performance
- Deliver rolling resistance and lower fuel consumption



HH026

Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

Size	HH107	HH118	HH126	HH026
11R22.5		148/145 M	146/143 L	148/145 M
12R22.5		152/149 M		
11R24.5			149/146 L	
235/75R17.5	143/141 J			
295/75R22.5		144/141 M		
295/75R22.5		146/143 L	146/143 L	
295/80R22.5				152/149 M
315/70R22.5				156/150L(154/150M)
315/80R22.5				156/152L(154/151M)
385/55R22.5				164 K
385/65R22.5	160 K			164 K
285/75R24.5			147/144 L	



Mixed
Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



ALL POSITION



HH301

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



HH301+

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



HH307

Features

- Three zigzag grooves
- Reinforced carcass and bead design
- Special groove design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property
- Provide excellent heat dissipation



HH105+

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

Size	HH301	HH301+	HH307	HH105+
6.50R16LT	110/105 K			
7.00R16LT	118/114 M			
7.50R16LT	122/118 M			
8.25R16LT	128/124 M			
8.25R20	139/137 L			
9.00R20	144/142 K			
10.00R20	149/146 K		149/146 K	
11.00R20	152/149 K		152/149 K	
12.00R20	156/153 K		156/153 K	
12.00R24	160/157 K			
11R22.5	148/145 M			
12R22.5	152/149 M		152/149 L	
13R22.5	156/152 L(154/151 M)			
11R24.5	149/146 L			
315/80R22.5		156/152 L(154/151 M)		156/152 L(154/151 M)



ALL POSITION



RSHH572

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



HH573


Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

Size	RSHH572	HH573
9.5R17.5	143/141 J	
13R22.5		156/153 L
325/95R24	162/160 K	

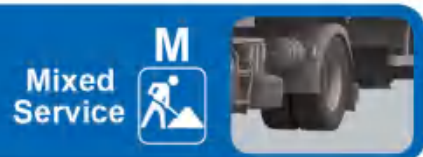

HH302

Features

- Special tread compound
- Block pattern design
- Extra wide footprint with square shoulder
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH306

Features

- Lug and block pattern design
- Special tread compound

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing



HH311

Features

- Special tread compound
- Lug and block pattern design
- Siped pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation



HH313

Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Improved traction, driving and braking performance
- Deliver stone-ejecting property
- Provide outstanding resistance to puncture and tearing
- Provide excellent heat dissipation

Size	HH302	HH306	HH311	HH313
7.00R16LT		118/114 M		
7.50R16LT		122/118 M		122/118 M
8.25R16LT		128/124 M		128/124 M
8.25R20		139/137 L		139/137 K
9.00R20		144/142 K	144/142 K	144/142 K
10.00R20	149/146 D	149/146 K	149/146 K	149/146 K
11.00R20	152/149 J	152/149 K	152/149 K	152/149 K
12.00R20	156/153 J	156/153 K	156/153 K	156/153 K
11R22.5			148/145 L	
12R22.5	152/149 M		152/149 M	
13R22.5	156/152 L(154/151 M)			
295/80R22.5	152/149 K			
315/80R22.5	156/152 L(154/151 M)			



HH322

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



HH329

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



HH303

Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, cutting resistance and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property



HH325

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

Size	HH322	HH329	HH303	HH325
7.00R16LT			118/114 K	
7.50R16LT			122/118 J	
8.25R16LT			128/124 J	
8.25R20			139/137 K	
9.00R20			144/142 J	
10.00R20		149/146 K	149/146 J	
11.00R20			152/149 J	
12.00R20			156/153 J	
12.00R24	160/157 K	160/157 K		160/157 K
11R22.5		148/145 L		
315/80R22.5	156/152 L(154/151 M)			



HH302W

Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance



HH399

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



RsHH373

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

Size	HH302W	HH399	RsHH373
9.00R20		144/142 K	
10.00R20		149/146 K	
11.00R20		152/149 K	
12.00R20		156/153 K	
315/80R22.5	156/152 L (154/151 M)		
325/95R24			162/160 K



HH556

Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance



HH557

Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance



HH335

Features

- Special tread compound
- Lug and block pattern design
- Siped pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation



HH336

Features

- Special tread compound
- Lug and block pattern design
- Siped pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation

Size	HH556	HH557	HH335	HH336
9.5R17.5			143/141 J	
13R22.5				156/153 L
295/80R22.5	152/149 M	152/149 M		
315/80R22.5	156/152 L (154/151 M)	156/152 L (154/151 M)		



HH168

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



HH317

Features

- Special tread compound
- Block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH318

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HH320

Features

- Special tread compound
- Lug and block pattern design
- Reinforced carcass and bead design

Benefits


- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions

Size	HH168	HH317	HH318	HH320
7.00R16LT	118/114 K			
7.50R16LT	122/118 J			
8.25R16LT	128/124 J			
8.25R20	139/137 C		139/137 C	
9.00R20	144/142 C		144/142 C	
10.00R20	149/146 C	149/146 K	149/146 C	
11.00R20	152/149 D	152/149 K	152/149 C	
12.00R20	156/153 C	156/153 K	156/153 C	
12.00R24		160/157 F		
11R22.5		148/145 C		
12R22.5		152/149 D		
295/80R22.5		152/149 F	152/149 C	152/149 C
315/80R22.5			156/152 L(154/151 M)	



DRIVE/TRAILER



HH321

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH929

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH826

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH332

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH321	HH929	HH826	HH332
7.50R16	122/118 L			
8.25R16	128/124 L			
8.25R20	139/137 K			
9.00R20	144/142 D			
10.00R20	149/146 D			
11.00R20	152/149 C	152/149 C		
12.00R20	156/153 C			
12.00R24	160/157 K		160/157 K	
11R22.5			149/146 L	148/145 J
11R24.5			149/146 K	149/146 K
295/80R22.5				



DRIVE/TRAILER



HH055

Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH591

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH519

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH056

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH055	HH591	HH519	HH056
12R22.5	152/149 F			
12.00R20		158/155 F	158/155 F	158/155 D

PRODUCT RANGE



Long Haul



Regional Haul

									
DIMENSION		HH105	HH117	HH599+	HH599	HH101	HH102	HH104	HH104+
7.50R16LT	16PR				125/121 L				
8.25R16	16PR								
9.00R20	16PR	144/142 K						144/142 K	
10.00R20	18PR	149/146 K						149/146 K	
11.00R20	18PR	152/149 K		152/149 J	152/149 K			152/149 K	
12.00R20	20PR	156/153 K						156/153 K	
12.00R24	20PR	160/157 K							
9.5R17.5	16PR								
11R22.5	16PR					148/145 M	148/145 M	148/145 M	
12R22.5	18PR		152/149 L			152/149 M	152/149 M		
13R22.5	20PR						156/152 L(154/151 M)		
11R24.5	14PR								
11R24.5	16PR								
215/75R17.5	16PR						135/133 J		
235/75R17.5	16PR								
225/70R19.5	14PR								
245/70R19.5	16PR								
255/70R22.5	16PR						140/137 L		
295/75R22.5	14PR								
295/75R22.5	16PR								
295/80R22.5	18PR						152/149 M		
315/70R22.5	20PR						154/150 L(152/148 M)		
315/80R22.5	20PR						156/152 L(154/151 M)		156/152 L(154/151 M)
285/75R24.5	14PR								
285/75R24.5	16PR								

									
HH106	HH111	HH121	HH123	HH124	HH680	HH127	HH788	HH689	HH061
						125/121 L			
		152/149 K	152/149 K						
								160/157 K	
		143/141 J							
	146/143 L								152/149 L
	146/143 M								
	149/146 L								
	135/133 J								
	143/141 J								
	128/126 L								
	135/133 L								
	140/137 L								
	144/141 M								
	146/143 L								
152/149 M		152/149 M					152/149 M		
		154/150 L(152/148 M)							
		156/152 L(154/151 M)		156/152 L(154/151 M)	156/152 L(154/151 M)				
	144/141 M								
	147/144 L								

PRODUCT RANGE



									
DIMENSION		HH976	HH979	HH192	HH571	HH661	HH685	HH122	HH368
9.00R20	18PR								
10.00R20	18PR								149/146 K
11.00R20	18PR								
12.00R20	20PR								
12.00R24	20PR							160/157 K	
11R22.5	16PR								
12R22.5	18PR	152/149 L	152/149 L	152/149 L	152/149 L	152/149 L			
13R22.5	20PR								
11R24.5	14PR								
11R24.5	16PR								
215/75R17.5	16PR								
235/75R17.5	16PR								
295/75R22.5	14PR								
295/75R22.5	16PR								
295/80R22.5	18PR						152/149 M		152/149 M
315/70R22.5	20PR								
315/80R22.5	20PR						156/152 L (154/151 M)		
285/75R24.5	14PR								
285/75R24.5	16PR								

										
	HH309	HH310	HH312	HH308A	HH505	HH323	HH326	HH328	HH331	HH616
				144/142 K						144/142 K
				149/146 K	149/146 D					149/146 K
										156/153 K
		160/157 K								
148/145 M			146/143 L	148/145 M		146/143 L				
152/149 M				152/149 M						
156/152 L (154/151 M)										
			146/143 M			146/143 M				
			149/146 L			149/146 L				
135/133 J										
143/141 J										
			144/141 M			144/141 M				
			146/143 L			146/143 L				
152/149 M							152/149 M			
154/150 L (152/148 M)				154/150 L (152/148 M)			154/150 L (152/148 M)			
156/152 L (154/151 M)				156/152 L (154/151 M)			156/152 L (154/151 M)	156/152 L (154/151 M)	156/152 L (154/151 M)	
			144/141 M			144/141 M				
			147/144 L			147/144 L				

PRODUCT RANGE




								
DIMENSION		HH626	HH308A+	HH327	HH051	HH081	HH565	HH391
9.00R20	18PR							
10.00R20	18PR	149/146 K						
11.00R20	18PR	152/149 K						
12.00R20	20PR							156/153 J
12.00R24	20PR							
11R22.5	16PR							
12R22.5	18PR		152/149 M		152/149 K	152/149 L	152/149 L	
13R22.5	20PR							
11R24.5	14PR							
11R24.5	16PR							
215/75R17.5	16PR							
235/75R17.5	16PR							
295/75R22.5	14PR							
295/75R22.5	16PR							
295/80R22.5	18PR							
315/70R22.5	20PR							
315/80R22.5	20PR			156/152 L (154/151 M)				
285/75R24.5	14PR							
285/75R24.5	16PR							
285/75R24.5	20PR							
385/55R22.5	24PR							
385/65R22.5	24PR							

							
HH533	HH538	HH806	HH107	HH118	HH126	HH026	
				148/145 M	146/143 L	148/145 M	
				152/149 M			
					149/146 L		
			143/141 J				
				144/141 M			
				146/143 L	146/143 L		
152/149 M	152/149 M	152/149 M				152/149 M	
156/150 L (154/150 M)	156/150 L (154/150 M)					156/150 L (154/150 M)	
156/152 L (154/151 M)						156/152 L (154/151 M)	
					147/144 L		
						164 K	
			160 K			164 K	

PRODUCT RANGE



Mixed Service



DIMENSION	HH301	HH301+	HH307	RSHH572	HH573	HH105+	HH302
6.50R16LT 12PR	110/105 K						
7.00R16LT 14PR	118/114 M						
7.50R16LT 14PR	122/118 M						
8.25R16LT 16PR	128/124 M						
8.25R20 16PR	139/137 L						
9.00R20 16PR	144/142 K						
9.5R17.5 18PR				143/141 J			
10.00R20 18PR	149/146 K		149/146 K				149/146 D
11.00R20 18PR	152/149 K		152/149 K				152/149 J
12.00R20 20PR	156/153 K		156/153 K				156/153 J
12.00R24 20PR	160/157 K						
11R22.5 16PR	148/145 M						
12R22.5 18PR	152/149 M		152/149 L				152/149 M
13R22.5 20PR	156/152 L(154/151 M)				156/153 L		156/152 L(154/151 M)
11R24.5 16PR	149/146 L						
295/80R22.5 18PR							152/149 K
315/80R22.5 20PR		156/152 L(154/151 M)				156/152 L(154/151 M)	156/152 L(154/151 M)
325/95R24 22PR				162/160 K			



HH306	HH311	HH313	HH322	HH329	HH303	HH325	HH302W
118/114 M					118/114 K		
122/118 M					122/118 J		
128/124 M		128/124 M			128/124 J		
139/137 L		139/137 K			139/137 K		
144/142 K	144/142 K	144/142 K			144/142 J		
149/146 K	149/146 K	149/146 K		149/146 K	149/146 J		
152/149 K	152/149 K	152/149 K			152/149 J		
156/153 K	156/153 K	156/153 K			156/153 J		
			160/157 K	160/157 K		160/157 K	
	148/145 L			148/145 L			
	152/149 M						
							156/152 L (154/151 M)

PRODUCT RANGE



								
DIMENSION		HH399	RS HH373	HH556	HH557	HH335	HH336	
6.50R16LT	12PR							
7.00R16LT	14PR							
7.50R16LT	14PR							
8.25R16LT	16PR							
8.25R20	16PR							
9.00R20	16PR	144/142 K						
9.5R17.5	18PR					143/141 J		
10.00R20	18PR	149/146 K						
11.00R20	18PR	152/149 K						
12.00R20	20PR	156/153 K						
12.00R24	20PR							
11R22.5	16PR							
12R22.5	18PR							
13R22.5	20PR						156/153 L	
11R24.5	16PR							
295/80R22.5	18PR			152/149 M	152/149 M			
315/80R22.5	20PR			158/152 L (154/151 M)	156/152 L (154/151 M)			
325/95R24	22PR		162/160 K					

[illegible]

PRODUCT RANGE



								
DIMENSION		HH168	HH317	HH318	HH320	HH321	HH929	HH826
7.00R16LT 14PR		118/114 K						
7.50R16LT 14PR		122/118 J				122/118 L		
8.25R16LT 16PR		128/124 J				128/124 L		
8.25R20 16PR		139/137 C		139/137 C		139/137 K		
9.00R20 16PR		144/142 C		144/142 C		144/142 D		
10.00R20 18PR		149/146 C	149/146 K	149/146 C		149/146 D		
11.00R20 18PR		152/149 D	152/149 K	152/149 C		152/149 C	152/149 C	
12.00R20 20PR		156/153 C	156/153 K	156/153 C		156/153 C		
12.00R20 22PR								
12.00R24 20PR			160/157 F			160/157 K		160/157 K
11R22.5 18PR			148/145 C					149/146 L
11R24.5 16PR								149/146 K
11R24.5 18PR								
12R22.5 18PR			152/149 D					
295/80R22.5 18PR			152/149 F	152/149 C	152/149 C			
315/80R22.5 20PR				156/152 L (154/151 M)				

								
	HH332	HH055	HH591	HH519	HH056			
			158/155 F	158/155 F	158/155 D			
	148/145 J							
	149/146 K							
		152/149 F						

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
6.50R16LT	12	6.5		16	110/105	K	HH301	M+S	M	5.50F	1150	1030	770	770	11.0	185	750
7.00R16LT	14	7		16	118/114	K	HH168	M+S	O	5.50F	1320	1180	770	770	15.5	200	775
7.00R16LT	14	7		16	118/114	M	HH301	M+S	M	5.50F	1320	1180	770	770	12.0	200	775
7.00R16LT	14	7		16	118/114	K	HH303	M+S	M	5.50F	1320	1180	770	770	14.0	200	775
7.00R16LT	14	7		16	118/114	M	HH306	M+S	M	5.50F	1320	1180	770	770	16.0	200	775
7.50R16LT	14	7.5		16	122/116	J	HH168	M+S	O	6.00G	1500	1320	770	770	16.5	215	805
7.50R16LT	14	7.5		16	122/116	M	HH301+	M+S	M	6.00G	1500	1320	770	770	13	215	805
7.50R16LT	14	7.5		16	122/116	J	HH303	M+S	M	6.00G	1500	1320	770	770	15	215	805
7.50R16LT	14	7.5		16	122/116	M	HH306	M+S	M	6.00G	1500	1320	770	770	14	215	805
7.50R16LT	14	7.5		16	122/116	M	HH313	M+S	M	6.00G	1500	1320	770	770	16	215	805
7.50R16LT	14	7.5		16	122/116	L	HH321	M+S	M	6.00G	1500	1320	770	770	16.5	210	809
7.50R16LT	16	7.50		16	125/121	L	HH127	M+S	L&R	6.00G	1650	1450	870	870	12	215	805
7.50R16LT	16	7.50		16	125/121	L	HH599	M+S	L&R	6.00G	1650	1450	870	870	12	315	1226
8.25R16LT	16	8.25		16	128/124	M	HH168	M+S	M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	J	HH301	M+S	M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	M	HH303	M+S	M	6.50H	1800	1600	770	770	15	235	855
8.25R16LT	16	8.25		16	128/124	M	HH306	M+S	M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	L	HH321	M+S	M	6.50H	1800	1600	770	770	16.5	230	860
8.25R20	16	8.25		20	139/137	C	HH168	M+S	O	6.5	2430	2300	930	930	21	236	974
8.25R20	16	8.25		20	139/137	C	HH301	M+S	M	6.5	2430	2300	930	930	13.5	236	974
8.25R20	16	8.25		20	139/137	K	HH303	M+S	M	6.5	2430	2300	930	930	16	236	974
8.25R20	16	8.25		20	139/137	L	HH306	M+S	M	6.5	2430	2300	930	930	14.5	236	974
8.25R20	16	8.25		20	139/137	K	HH313	M+S	M	6.5	2430	2300	930	930	16	236	974
8.25R20	16	8.25		20	139/137	C	HH316	M+S	O	6.5	2430	2300	930	930	16	236	974
8.25R20	16	8.25		20	139/137	K	HH321	M+S	O	6.5	2430	2300	930	930	16	236	974
9.00R20	16	9		20	144/142	K	HH308A	M+S	L&R	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	K	HH104	M+S	L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	K	HH105	M+S	L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	C	HH168	M+S	O	7.0	2800	2650	900	900	21.5	259	1019
9.00R20	16	9		20	144/142	K	HH301	M+S	M	7.0	2800	2650	900	900	15.5	259	1019
9.00R20	16	9		20	144/142	J	HH303	M+S	M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	K	HH306	M+S	M	7.0	2800	2650	900	900	16	259	1019
9.00R20	16	9		20	144/142	K	HH311	M+S	M	7.0	2800	2650	900	900	16.5	259	1019
9.00R20	16	9		20	144/142	K	HH313	M+S	M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	C	HH216	M+S	M	7.0	2800	2650	900	900	17	258	1018
9.00R20	16	9		20	144/142	K	HH616	M+S	L&R	7.0	2800	2650	900	900	16	260	1019
9.00R20	16	9		20	144/142	K	HH392	M+S	M	7.0	2800	2650	900	900	18	260	1023
9.00R20	16	9		20	144/142	D	HH321	M+S	M	7.0	2800	2650	900	900	20	260	1027
10.00R20	18	10		20	149/146	K	HH104	M+S	L&R	7.5	3250	3000	930	930	15	278	1054
10.00R20	18	10		20	149/146	K	HH105	M+S	L&R	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	C	HH168	M+S	O	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	HH301	M+S	M	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	K	HH302	M+S	M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	J	HH303	M+S	M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HH306	M+S	M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	HH308A	M+S	L&R	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	HH311	M+S	M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	HH313	M+S	M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HH317	M+S	O	7.5	3250	3000	930	930	20.5	278	1065
10.00R20	18	10		20	149/146	C	HH318	M+S	O	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HH389	M+S	L&R	7.5	3250	3000	930	930	21	278	1054
10.00R20	18	10		20	149/146	K	HH505	M+S	L&R	7.5	3250	3000	930	930	20.5	278	1054
10.00R20	18	10		20	149/146	K	HH616	M+S	L&R	7.5	3250	3000	930	930	16.5	278	1046
10.00R20	18	10		20	149/146	K	HH626	M+S	L&R	7.5	3250	3000	930	930	15	278	1046
10.00R20	18	10		20	149/146	K	HH399	M+S	M	7.5	3250	3000	930	930	19	278	1054
10.00R20	18	10		20	149/146	D	HH321	M+S	M	7.5	3250	3000	930	930	18.5	276	1048
11.00R20	18	11		20	152/149	K	HH104	M+S	L&R	8.0	3550	3250	930	930	17	293	1085

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11.00R20	18	11		20	152/149	K	HH105	M+S	L&R	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	K	HH124	M+S	L&R	8.0	3550	3250	930	930	15.5	293	1085
11.00R20	18	11		20	152/149	K	HH123	M+S	L&R	8.0	3550	3250	930	930	16.5	293	1085
11.00R20	18	11		20	152/149	K	HH301	M+S	M	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	J	HH302	M+S	M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	J	HH303	M+S	M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	K	HH306	M+S	M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HH307	M+S	M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HH311	M+S	M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	K	HH313	M+S	M	8.0	3550	3250	930	930	19	293	1085
11.00R20	18	11		20	152/149	K	HH317	M+S	O	8.0	3550	3250	930	930	21	293	1085
11.00R20	18	11		20	152/149	C	HH318	M+S	O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	C	HH321	M+S	O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	J	HH599+	M+S	L&R	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HH599	M+S	L&R	8.0	3550	3250	930	930	16.5	288	1083
11.00R20	18	11		20	152/149	K	HH626	M+S	M	8.0	3550	3250	930	930	15.5	276	1046
11.00R20	18	11		20	152/149	K	HH399	M+S	M	8.0	3550	3250	930	930	20	288	1088
11.00R20	18	11		20	152/149	C	HH626	M+S	O	8.0	3550	3250	930	930	27.5	288	1108
11.00R20	18	11		20	152/149	D	HH180	M+S	O	8.0	3550	3250	930	930	16.5	293	1085
12.00R20	20	12		20	158/153	K	HH104	M+S	L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	158/153	K	HH105	M+S	L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	158/153	C	HH168	M+S	O	8.5	3750	3450	830	830	24	315	1136
12.00R20	20	12		20	158/153	K	HH301	M+S	M	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	158/153	J	HH302	M+S	M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	158/153	J	HH303	M+S	M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	158/153	K	HH306	M+S	M	8.5	3750	3450	830	830	18.5	315	1125
12.00R20	20	12		20	158/153	K	HH307	M+S	M	8.5	3750	3450	830	830	18	315	1125
12.00R20	20	12		20	158/153	K	HH311	M+S	M	8.5	3750	3450	830	830	19	315	1125
12.00R20	20	12		20	158/153	K	HH313	M+S	M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	158/153	K	HH317	M+S	O	8.5	3750	3450	830	830	21.5	315	1125
12.00R20	20	12		20	158/153	C	HH318	M+S	O	8.5	3750	3450	830	830	25	315	1136
12.00R20	20	12		20	158/153	C	HH321	M+S	O	8.5	3750	3450	830	830	25	315	1136
12.00R20	20	12		20	158/153	K	HH616	M+S	L&R	8.5	4000	3650	900	900	19.5	310	1122
12.00R20	20	12		20	158/153	K	HH399	M+S	M	8.5	4000	3650	900	900	21	310	1130
12.00R20	20	12		20	158/153	J	HH591	M+S	L&R	8.5	4000	3650	900	900	21.5	315	1136
12.00R20	22	12		20	158/155	F	HH591	M+S	O	8.5	4250	3875	970	970	25	315	1136
12.00R20	22	12		20	158/155	F	HH519	M+S	O	8.5	4250	3875	970	970	26.5	315	1138
12.00R20	22	12		20	158/155	D	HH056	M+S	O	8.5	4250	3875	970	970	24.5	315	1138
12.00R24	20	12		24	160/157	K	HH122	M+S	L&R	8.5	4500	4125	900	900	15.5	315	1125
12.00R24	20	12		24	160/157	K	HH301	M+S	M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	HH310	M+S	L&R	8.5	4500	4125	900	900	20	315	1125
12.00R24	20	12		24	160/157	K	HH322	M+S	M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	HH329	M+S	M	8.5	4500	4125	900	900	19	315	1125
12.00R24	20	12		24	160/157	K	HH325	M+S	M	8.5	4500	4125	900	900	18.5	315	1226
12.00R24	20	12		24	160/157	F	HH317	M+S	M	8.5	4500	4125	900	900	18.5	236	1226
12.00R24	20	12		24	160/157	K	HH695	M+S	L&R	8.5	4500	4125	900	900	16	315	1216
12.00R24	20	12		24	160/157	K	HH626	M+S	O	8.5	4500	4125	900	900	24	238	1231
12.00R24	20	12		24	160/157	K	HH105	M+S	O	8.5	4500	4125	900	900	16	315	1226
11R22.5	16	11		22.5	148/145	M	HH101	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	HH102	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	HH104	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/143	L	HH111	M+S	L&R	8.25	3000	2725	830	830	15	279	1054
11R22.5	16	11		22.5	148/145	M	HH118	M+S	L&R	8.25	3190	2900	850	850	11.8	279	1054
11R22.5	16	11		22.5	148/145	M	HH301	M+S	M	8.25	3150	2900	850	850	15.5	279	1054
11R22.5	16	11		22.5	148/145	M	HH308A	M+S	L&R	8.25	3190	2900	850	850	20	278	1054
11R22.5	16	11		22.5	148/145	M	HH309	M+S	L&R	8.25	3150	2900	850	850	16.5	279	1054
11R22.5	16	11		22.5	148/143	L	HH312	M+S	L&R	8.25	3000	2725	830	830	21.5	278	1065
11R22.5	16	11		22.5	148/145	L	HH329	M+S	M	8.25	3000	2725	830	830	16.5	279	1065
11R22.5	16	11		22.5	148/143	L	HH323	M+S	L&R	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	148/143	L	HH126	M+S	L&R	8.25	3000	2725	830	830	10	279	1054
11R22.5	16	11		22.5	148/143	M	HH626	M+S	O	8.25	3000	2725	830	830	22.5	273	1058
11R22.5	16	11		22.5	148/145	J	HH322	M+S	O	8.25	3150	2900	850	850	24.5	279	1065
11R22.5	16	11		22.5	148/145	C	HH317	M+S	O	8.25	3150	2900	850	850	20	279	1054
11R22.5	16	11		22.5	148/145	L	HH311	M+S	O	8.25	3150	2900	850	850	16.5	279	1054

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11R22.5	16	11	22.5	148/145		M	HH026	M+S	L&R	8.25	3150	2600	850	850	15	279	1054
12R22.5	18	12	22.5	152/149		M	HH101	M+S	L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12	22.5	152/149		M	HH102	M+S	L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12	22.5	152/149		L	HH117	M+S	L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12	22.5	152/149		M	HH118	M+S	L&R	9.00	3550	3250	930	930	12.5	300	1085
12R22.5	18	12	22.5	152/149		M	HH301	M+S	M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12	22.5	152/149		M	HH302	M+S	M	9.00	3550	3250	930	930	20	300	1085
12R22.5	18	12	22.5	152/149		L	HH307	M+S	M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12	22.5	152/149		M	HH309	M+S	L&R	9.00	3550	3250	930	930	17.5	300	1085
12R22.5	18	12	22.5	152/149		M	HH311	M+S	M	9.00	3550	3250	930	930	18.5	300	1085
12R22.5	18	12	22.5	152/149		M	HH309A+	M+S	L&R	9.00	3550	3250	930	930	20	300	1087
12R22.5	18	12	22.5	152/149		D	HH317	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
12R22.5	18	12	22.5	152/149		F	HH055	M+S	O	9.00	3550	3250	930	930	25	300	1098
12R22.5	18	12	22.5	152/149		K	HH051	M+S	L&R	9.00	3550	3250	930	930	21.5	300	1096
12R22.5	18	12	22.5	152/149		L	HH081	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
12R22.5	18	12	22.5	152/149		L	HH081	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
12R22.5	18	12	22.5	152/149		L	HH078	M+S	L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12	22.5	152/149		L	HH079	M+S	L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12	22.5	152/149		L	HH192	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
12R22.5	18	12	22.5	152/149		L	HH565	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
12R22.5	18	12	22.5	152/149		L	HH671	M+S	L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12	22.5	152/149		L	HH681	M+S	L&R	9.00	3550	3250	930	930	18	300	1085
13R22.5	20	13	22.5	156/152(154/151)		L(M)	HH102	M+S	L&R	9.75	4000	3550	960	960	17	320	1124
13R22.5	20	13	22.5	156/152(154/151)		L(M)	HH301	M+S	M	9.75	4000	3550	960	960	18.5	320	1124
13R22.5	20	13	22.5	156/152(154/151)		L(M)	HH302	M+S	M	9.75	4000	3550	960	960	20	320	1124
13R22.5	20	13	22.5	156/152(154/151)		L(M)	HH309	M+S	L&R	9.75	4000	3550	960	960	18	320	1124
13R22.5	20	13	22.5	156/153		L	HH336	M+S	M	9.75	4000	3650	930	930	19	320	1124
13R22.5	20	13	22.5	156/153		L	HH573	M+S	M	9.75	4000	3650	930	930	17	320	1124
11R24.5	14	11	24.5	146/143		M	HH111	M+S	L&R	8.25	3000	2725	720	720	15	279	1104
11R24.5	14	11	24.5	146/143		M	HH312	M+S	L&R	8.25	3000	2725	720	720	21.5	279	1104
11R24.5	14	11	24.5	146/143		M	HH323	M+S	L&R	8.25	2800	2575	760	760	22	283	1062
11R24.5	16	11	24.5	146/146		L	HH111	M+S	L&R	8.25	3250	3000	830	830	16	279	1104
11R24.5	16	11	24.5	146/146		L	HH301	M+S	M	8.25	3250	3000	830	830	16.5	279	1104
11R24.5	16	11	24.5	146/146		L	HH312	M+S	L&R	8.25	3250	3000	830	830	21.5	279	1104
11R24.5	16	11	24.5	146/146		L	HH323	M+S	M	8.25	3250	3000	830	830	21.5	279	1116
11R24.5	16	11	24.5	146/146		L	HH126	M+S	M	8.25	3250	3000	830	830	10	302	1104
11R24.5	16	11	24.5	146/146		K	HH332	M+S	O	8.25	3250	3000	830	830	24.5	284	1114.5
11R24.5	18	11	24.5	152/149		K	HH826	M+S	O	8.25	3550	3250	930	930	20.5	279	1104
215/75R17.5	16	215	75	17.5	135/133	J	HH102	M+S	L&R	6.00	2180	2060	850	850	12	212	767
215/75R17.5	16	215	75	17.5	135/133	J	HH111	M+S	L&R	6.00	2180	2060	850	850	13	212	767
215/75R17.5	16	215	75	17.5	135/133	J	HH309	M+S	L&R	6.00	2180	2060	850	850	14	212	767
235/75R17.5	18	235	75	17.5	143/141	J	HH107	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	18	235	75	17.5	143/141	J	HH111	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	18	235	75	17.5	143/141	J	HH309	M+S	L&R	6.75	2725	2575	875	875	15	233	797
225/70R19.5	14	225	70	19.5	128/126	L	HH111	M+S	L&R	6.75	1900	1700	760	760	13	228	811
245/70R19.5	16	245	70	19.5	135/133	L	HH111	M+S	L&R	7.50	2180	2060	830	830	13	248	839
255/70R22.5	18	255	70	22.5	140/137	L	HH109	M+S	L&R	7.50	2500	2300	830	830	14	255	930
255/70R22.5	18	255	70	22.5	140/137	L	HH111	M+S	L&R	7.50	2500	2300	830	830	13	255	930
295/75R22.5	14	295	75	22.5	144/141	M	HH111	M+S	L&R	9.00	2800	2575	760	760	15.5	298	1014
295/75R22.5	14	295	75	22.5	144/141	M	HH312	M+S	L&R	9.00	2800	2575	780	780	23	298	1028
295/75R22.5	14	295	75	22.5	144/141	M	HH118	M+S	L&R	9.00	2800	2575	760	760	11	298	1014
295/75R22.5	14	295	75	22.5	144/141	M	HH323	M+S	L&R	9.00	2800	2575	780	780	22	298	1028
295/75R22.5	16	295	75	22.5	146/143	L	HH111	M+S	L&R	9.00	3000	2725	830	830	15.5	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	HH312	M+S	L&R	9.00	3000	2725	830	830	22	298	1028
295/75R22.5	16	295	75	22.5	146/143	L	HH118	M+S	L&R	9.00	3000	2725	830	830	11	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	HH322	M+S	L&R	9.00	3000	2725	830	830	22	298	1028
295/75R22.5	16	295	75	22.5	146/143	L	HH126	M+S	L&R	9.00	3000	2725	830	830	10	298	1014
295/80R22.5	18	295	80	22.5	152/149	C	HH320	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	C	HH121	M+S	L&R	9.00	3550	3250	900	900	18.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH102	M+S	L&R	9.00	3550	3250	900	900	15	298	1044

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
295/80R22.5	18	295	80	22.5	152/149	M	HH108	M+S	L&R	9.00	3550	3250	900	900	15	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH309	M+S	L&R	9.00	3550	3250	900	900	20.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	C	HH318	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH308	M+S	L&R	9.00	3550	3250	900	900	18	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH328	M+S	L&R	9.00	3550	3250	900	900	17.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH788	M+S	L&R	9.00	3550	3250	900	900	18	292	1047
295/80R22.5	18	295	80	22.5	152/149	M	HH826	M+S	O	9.00	3550	3250	900	900	24.5	292	1060
295/80R22.5	18	295	80	22.5	152/149	F	HH317	M+S	O	9.00	3550	3250	900	900	21.8	308	1080
295/80R22.5	18	295	80	22.5	152/149	K	HH302	M+S	M	9.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH538	M+S	L&R	9.00	3550	3250	900	900	21	298	1050
295/80R22.5	18	295	80	22.5	152/149	M	HH556	M+S	M	9.00	3550	3250	900	900	21	298	1050
295/80R22.5	18	295	80	22.5	152/149	M	HH026	M+S	L&R	9.00	3550	3250	900	900	16	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH557	M+S	M	9.00	3550	3250	900	900	21	298	1050
295/80R22.5	18	295	80	22.5	152/149	M	HH805	M+S	L&R	9.00	3550	3250	900	900	15.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH533	M+S	L&R	9.00	3550	3250	900	900	20	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	HH806	M+S	L&R	9.00	3550	3250	900	900	22.5	292	1047
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	HH102	M+S	L&R	9.00	3750	3350	900	900	15	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	HH121	M+S	L&R	9.00	3750	3350	900	900	15.5	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	HH308A	M+S	L&R	9.00	3750	3350	900	900	20	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	HH309	M+S	L&R	9.00	3750	3350	900	900	21	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	HH326	M+S	L&R	9.00	3750	3350	900	900	19.5	312	1014
315/70R22.5	20	315	70	22.5	154/150(154/150)	L(M)	HH538	M+S	L&R	9.00	4000	3350	900	900	19.5	312	1020
315/70R22.5	20	315	70	22.5	154/150(154/150)	L(M)	HH533	M+S	L&R	9.00	4000	3350	900	900	18.5	312	1020
315/70R22.5	20	315	70	22.5	154/150(154/150)	L(M)	HH026	M+S	L&R	9.00	4000	3350	900	900	15.5	312	1014
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH102	M+S	L&R	9.00	4000	3550	900	900	14.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH104+	M+S	L&R	9.00	4000	3550	900	900	14.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH121	M+S	L&R	9.00	4000	3550	900	900	15.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH122	M+S	L&R	9.00	4000	3550	900	900	15.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH124	M+S	L&R	9.00	4000	3550	900	900	15.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH303+	M+S	M	9.00	4000	3550	900	900	17.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH302	M+S	M	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH308A	M+S	L&R	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH306	M+S	L&R	9.00	4000	3550	900	900	20	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH322	M+S	M	9.00	4000	3550	900	900	20.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH800	M+S	L&R	9.00	4000	3550	900	900	14.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH326	M+S	L&R	9.00	4000	3550	900	900	20	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH328	M+S	L&R	9.00	4000	3550	900	900	20	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH331	M+S	L&R	9.00	4000	3550	900	900	20	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH302W	M+S	M	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH327	M+S	L&R	9.00	4000	3550	900	900	20	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH105+	M+S	M	9.00	4000	3550	900	900	17.5	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH318	M+S	M	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH556	M+S	M	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH557	M+S	M	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH533	M+S	L&R	9.00	4000	3550	900	900	23	312	1026
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HH026	M+S	L&R	9.00	4000	3550	900	900	23	312	1026
385/55R22.5	24	385	55	22.5	164	K	HH026	M+S	L&R	12.25	5000	—	900	—	15	386	996
385/65R22.5	20	385	65	22.5	160	K	HH107	M+S	L&R	11.75	4500	—	800	—	17	388	1072
385/65R22.5	24	385	65	22.5	164	K	HH026	M+S	L&R	11.75	5000	—	900	—	16	389	1072
285/75R24.5	14	285	75	24.5	144/141	M	HH111	M+S	L&R	8.25	2800	2575	760	760	15.5	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	HH312	M+S	L&R	8.25	2800	2575	760	760	22	283	1056
285/75R24.5	14	285	75	24.5	144/141	M	HH323	M+S	L&R	8.25	2800	2575	760	760	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	HH111	M+S	L&R	8.25	3075	2800	830	830	15.5	283	1050
285/75R24.5	16	285	75	24.5	147/144	L	HH312	M+S	L&R	8.25	3075	2800	830	830	22	283	1056
285/75R24.5	16	285	75	24.5	147/144	L	HH323	M+S	L&R	8.25	3075	2800	830	830	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	HH126	M+S	L&R	8.25	3075	2800	830	830	10	283	1050
325/95R24	22	325	95	24	162/160	K	RSHH572	M+S	M	8.5	4750	4500	850	850	17	325	1226
325/95R24	22	325	95	24	162/160	K	RSHH373	M+S	M	8.5	4750	4500	850	850	19	325	1228
9.5R17.5	18	9.5		17.5	143/141	J	HH121	M+S	L&R	6.75	2725	2575	875	875	13	240	842
9.5R17.5	18	9.5		17.5	143/141	J	HH335	M+S	M	6.75	2725	2575	875	875	16	240	842
9.5R17.5	18	9.5		17.5	143/141	J	HH572	M+S	M	6.75	2725	2575	875	875	15	240	842