

HIFLY TIRES

Shandong Changfeng Tyres Co., Ltd.

Dawang Economic Development Zone, Dongying, Shandong, 257335, China

Tel: +86 546 6893270 Fax: +86 546 6893669

Website: <http://www.changfengtires.com>

E-mail: sales@changfengtires.com

Ver.26-1

HIFLY TIRES

NO MATTER WHERE THE ROAD LEADS, HIFLY WILL JOURNEY ALONGSIDE



CATALOGUE

COMFORT/SPORT-SUV/4×4-VAN
Economical·ALL SEASON·EV-SPECIFIC·SAND·TAXI



Company Profile:

HIFLY Tires, enjoying high popularity in both domestic and international markets, is one of the major brands developed by Shandong Changfeng Tyres Co., Ltd.

Shandong Changfeng Tyres Co., Ltd., one of the major tire manufacturers in China, was established in 1995 and covers an area of 2 million square meters, with total assets of over 5 billion RMB and more than 10,000 employees. The company owns 6 plants in Dongying and Linyi city, Shandong province, China. Three plants are for TBR products with annual production capacity of 6 million tires, another three plants are for PCR products with annual production capacity of 30 million tires.

Changfeng specializes in manufacturing radial tires which are widely used in passenger car, SUV, light truck, truck and bus etc., and in all seasons with excellent performance, which are well-reputed all over the world.

Changfeng takes pride in its experienced R&D team and advanced testing facilities, which assure the excellent and stable quality of its products. Many of Changfeng's manufacturing equipments are imported from Europe, United States and Japan.

Changfeng has built a strong quality assurance system and its products are accredited with certificates of ISO9001, IATF16949, DOT, ECE, GCC, INMETRO, CCC, BIS, SNI, SONCAP, etc.

Qualifications



IATF16949



SNI




INMETRO



ISO9001




GCC

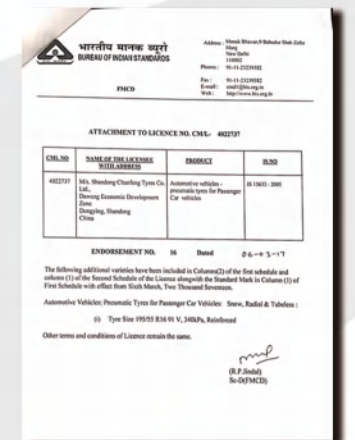

BIS



SONCAP

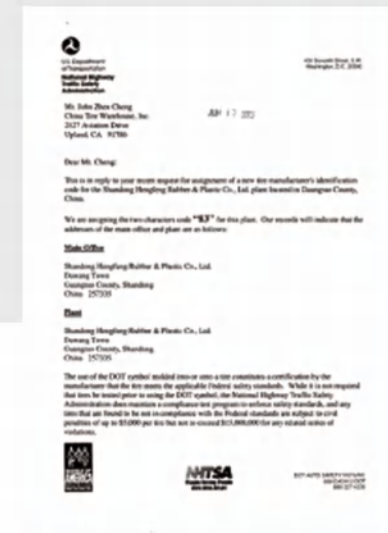

DOT



ECE



We export to more than 120 countries in the world

COMFORT/SPORT



SUV/4x4



VAN



Economical



ALL SEASON



EV-SPECIFIC




SAND




TAXI



HF805



ULTRA HIGH PERFORMANCE &
ASYMMETRICAL PATTERN DESIGN

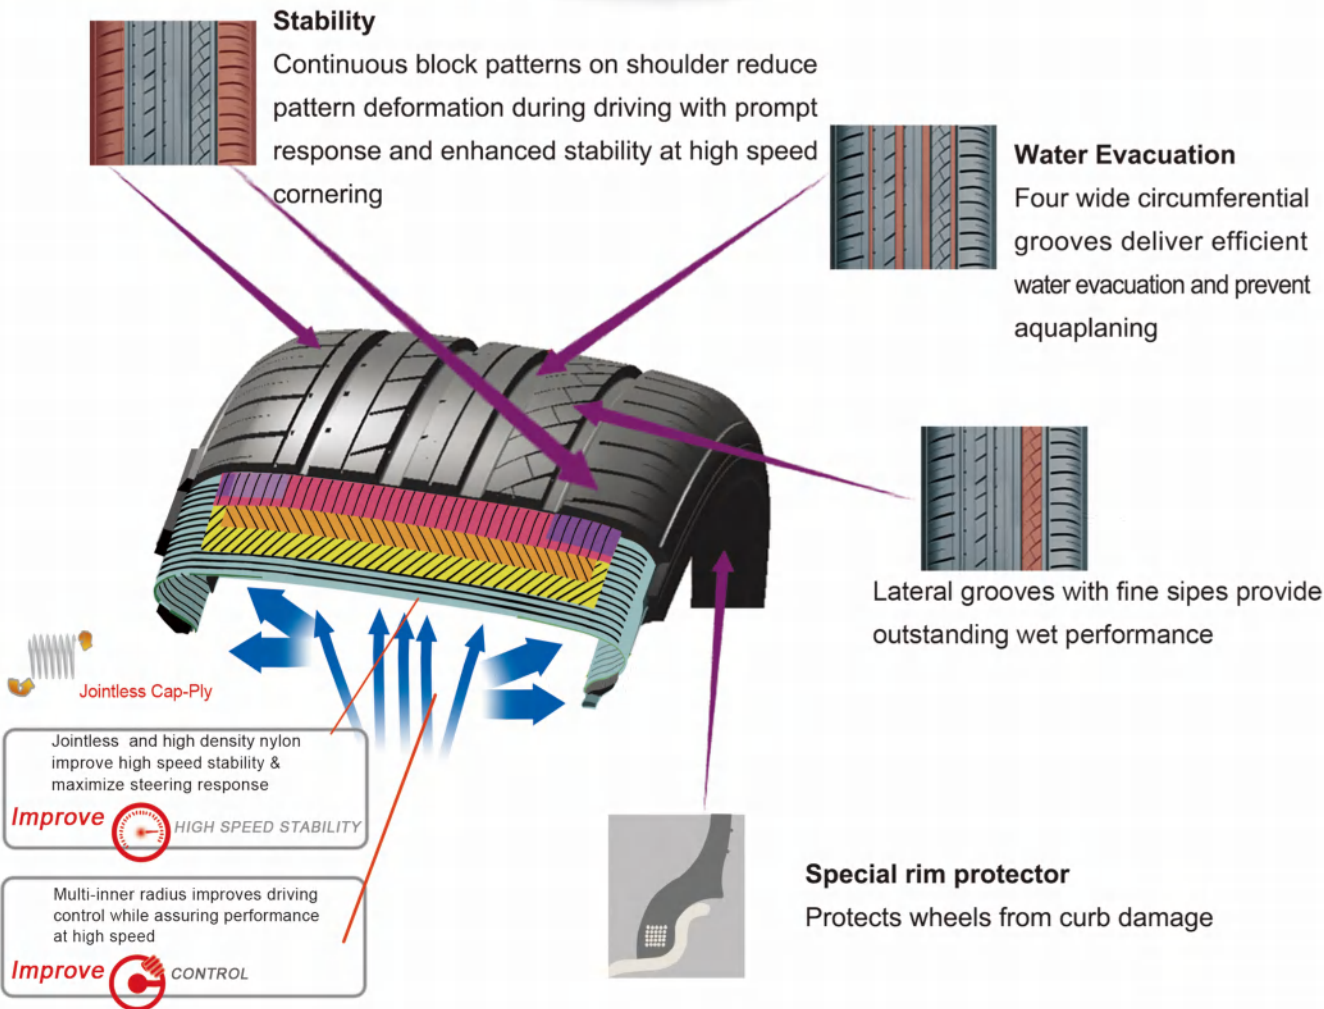

HF805

COMFORT/SPORT

Series	Size	Load Index	Speed Rating	UTQG
15	195/45R15	82XL	V	280AAA
	165/50R15	72	V	280AAA
	175/50R15	75	V	280AAA
	195/50R15	86XL	V	280AAA
	205/50R15	86	V	280AAA
	165/55R15	75	V	280AAA
	195/55R15	85	V	280AAA
16	205/55R15	88	V	280AAA
	165/45R16	74XL	V	280AAA
	195/45R16	84XL	V	280AAA
	205/45R16	87XL	W	280AAA
	185/50R16	81	V	280AAA
	195/50R16	88XL	V	280AAA
	205/50R16	91XL	W	280AAA
17	225/50R16	92	V	280AAA
	195/55R16	91XL	V	280AAA
	185/55R16	83	V	280AAA
	205/55R16	94XL	W	280AAA
	215/55R16	97XL	V	280AAA
	215/55R16	97XL	W	280AAA
	225/55R16	99XL	V	280AAA
18	195/40R17	81XL	W	280AAA
	205/40R17	84XL	W	280AAA
	215/40R17	87XL	W	280AAA
	245/40R17	95XL	W	280AAA
	205/45R17	88XL	W	280AAA
	215/45R17	91XL	W	280AAA
	225/45R17	94XL	W	280AAA
19	235/45R17	97XL	W	280AAA
	245/45R17	99XL	W	280AAA
	205/50R17	93XL	W	280AAA
	215/50R17	95XL	W	280AAA
	225/50R17	98XL	W	280AAA
	205/55R17	95XL	W	280AAA
	215/55R17	98XL	W	280AAA
20	225/55R17	101XL	W	280AAA
	235/55R17	103XL	W	280AAA
	245/30R20	90XL	W	280AAA
	245/30R20	95XL	W	280AAA
	255/30R20	92XL	W	280AAA
	275/30R20	97XL	W	280AAA
	225/35R20	90XL	W	280AAA
21	225/35R20	93XL	W	280AAA
	245/35R20	95XL	W	280AAA
	255/35R20	97XL	W	280AAA
	295/35R21	107XL	Y	280AAA

Series	Size	Load Index	Speed Rating	UTQG
18	215/35R18	84XL	W	280AAA
	225/35R18	87XL	W	280AAA
	255/35R18	94XL	W	280AAA
	265/35R18	97XL	W	280AAA
	215/40R18	89XL	W	280AAA
	225/40R18	92XL	W	280AAA
	235/40R18	95XL	W	280AAA
19	245/40R18	97XL	W	280AAA
	215/45R18	93XL	W	280AAA
	225/45R18	95XL	W	280AAA
	235/45R18	98XL	W	280AAA
	245/45R18	100XL	W	280AAA
	255/45R18	103XL	W	280AAA
	235/50R18	101XL	W	280AAA
20	265/30R19	93XL	W	280AAA
	275/30R19	96XL	W	280AAA
	215/35R19	85XL	W	280AAA
	225/35R19	88XL	W	280AAA
	235/35R19	91XL	W	280AAA
	245/35R19	93XL	W	280AAA
	255/35R19	96XL	W	280AAA
21	275/35R19	100XL	W	280AAA
	225/40R19	93XL	W	280AAA
	235/40R19	96XL	W	280AAA
	245/40R19	98XL	W	280AAA
	255/40R19	100XL	W	280AAA
	245/45R19	102XL	W	280AAA
	245/30R20	90XL	W	280AAA
22	245/30R20	95XL	W	280AAA
	255/30R20	92XL	W	280AAA
	275/30R20	97XL	W	280AAA
	225/35R20	90XL	W	280AAA
	225/35R20	93XL	W	280AAA
	245/35R20	95XL	W	280AAA
	255/35R20	97XL	W	280AAA

HF-820



 **15-20 Inch**

 **35-65 Series**

 **Speed Rating: H-Y**

UTQG: 280AAA

ULTRA HIGH PERFORMANCE &
ASYMMETRICAL PATTERN DESIGN

Features

- Special tread compound
- Four wide circumferential tread grooves
- Continuous solid center ribs
- Improved groove and bead profile design
- Optimized variable pitch tread design

Benefits

- Excellent grip on wet and dry roads
- Deliver excellent performance on wet roads
- Improve directional stability, provide more comfortable experience and prevent irregular wear
- Better ride stability and handling performance
- Superior comfort and quiet ride


HF-820

COMFORT/SPORT

Series	Size	Load Index	Speed Rating	UTQG
15	195/50R15	86 XL	V	280AAA
	185/55R15	82	V	280AAA
	195/55R15	85	V	280AAA
	205/55R15	88	V	280AAA
	195/60R15	88	V	280AAA
	205/60R15	91	V	280AAA
16	195/65R15	91	V	280AAA
	195/45R16	84 XL	V	280AAA
	205/45R16	87 XL	W	280AAA
	195/50R16	88 XL	V	280AAA
	185/55R16	83	V	280AAA
	195/55R16	91 XL	V	280AAA
	205/55R16	91	V	280AAA
	205/55R16	94 XL	W	280AAA
	215/55R16	97 XL	V	280AAA
	225/55R16	99 XL	V	280AAA
	205/60R16	96 XL	V	280AAA
	215/60R16	99 XL	V	280AAA
17	215/65R16	98	H	280AAA
	205/40R17	84 XL	W	280AAA
	215/40R17	87 XL	W	280AAA
	205/45R17	88 XL	W	280AAA
	215/45R17	91 XL	W	280AAA
	225/45R17	94 XL	W	280AAA
	235/45R17	97 XL	Y	280AAA
	245/45R17	99 XL	Y	280AAA
	205/50R17	93 XL	W	280AAA
	215/50R17	95 XL	W	280AAA
	225/50R17	98 XL	Y	280AAA
	205/55R17	95 XL	W	280AAA
18	215/55R17	98 XL	W	280AAA
	225/55R17	101 XL	W	280AAA
	235/55R17	103 XL	W	280AAA
	215/65R17	103 XL	V	280AAA
	225/55R18	98	W	280AAA
	225/60R18	104 XL	W	280AAA
19	235/35R19	91 XL	W	280AAA
	245/35R19	93 XL	Y	280AAA
	255/35R19	96 XL	Y	280AAA
	225/40R19	93 XL	Y	280AAA
	235/40R19	96 XL	W	280AAA
	245/40R19	98 XL	Y	280AAA
	225/45R19	96 XL	Y	280AAA
	235/45R19	99 XL	Y	280AAA
	245/45R19	102 XL	W	280AAA
	255/45R19	104 XL	Y	280AAA
	235/50R19	103 XL	W	280AAA
	235/55R19	105 XL	W	280AAA
20	275/35R20	102 XL	Y	280AAA
	225/40R20	94 XL	Y	280AAA
	245/40R20	99 XL	Y	280AAA
	275/40R20	106 XL	Y	280AAA
	235/45R20	100 XL	Y	280AAA
	255/45R20	105 XL	Y	280AAA
	275/45R20	110 XL	Y	280AAA
	255/50R20	109 XL	Y	280AAA

Series	Size	Load Index	Speed Rating	UTQG
18	265/35R18	97 XL	Y	280AAA
	225/40R18	92 XL	Y	280AAA
	235/40R18	95 XL	Y	280AAA
	245/40R18	97 XL	Y	280AAA
	215/45R18	93 XL	W	280AAA
	225/45R18	95 XL	W	280AAA
19	235/45R18	98 XL	Y	280AAA
	245/45R18	100 XL	W	280AAA
	215/50R18	92	W	280AAA
	225/50R18	99 XL	W	280AAA
	235/50R18	101 XL	W	280AAA
	215/55R18	99 XL	V	280AAA
	225/55R18	98	W	280AAA
	225/60R18	104 XL	W	280AAA
	235/35R19	91 XL	W	280AAA
	245/35R19	93 XL	Y	280AAA
	255/35R19	96 XL	Y	280AAA
	225/40R19	93 XL	Y	280AAA
20	235/40R19	96 XL	W	280AAA
	245/40R19	98 XL	Y	280AAA
	225/45R19	96 XL	Y	280AAA
	235/45R19	99 XL	Y	280AAA
	245/45R19	102 XL	W	280AAA
	255/45R19	104 XL	Y	280AAA
	235/50R19	103 XL	W	280AAA
	235/55R19	105 XL	W	280AAA
	275/35R20	102 XL	Y	280AAA
	225/40R20	94 XL	Y	280AAA
	245/40R20	99 XL	Y	280AAA
	275/40R20	106 XL	Y	280AAA
	235/45R20	100 XL	Y	280AAA
	255/45R20	105 XL	Y	280AAA
	275/45R20	110 XL	Y	280AAA
	255/50R20	109 XL	Y	280AAA

xHF-816



17-18 Inch

40-45 Series

Speed Rating: Y


UTQG: 280AAA

ULTRA HIGH PERFORMANCE ESPECIALLY
FOR HIGH SPEED SUPER SPORTS VEHICLES

xHF-816

COMFORT/SPORT

Series	Size	Load Index	Speed Rating	UTQG
17	215/40ZR17	87XL	Y	280AAA
	205/45ZR17	88XL	Y	280AAA
	225/45ZR17	94XL	Y	280AAA
18	225/40ZR18	92XL	Y	280AAA
	245/40ZR18	97XL	Y	280AAA
	225/45ZR18	95XL	Y	280AAA
	245/45ZR18	100XL	Y	280AAA

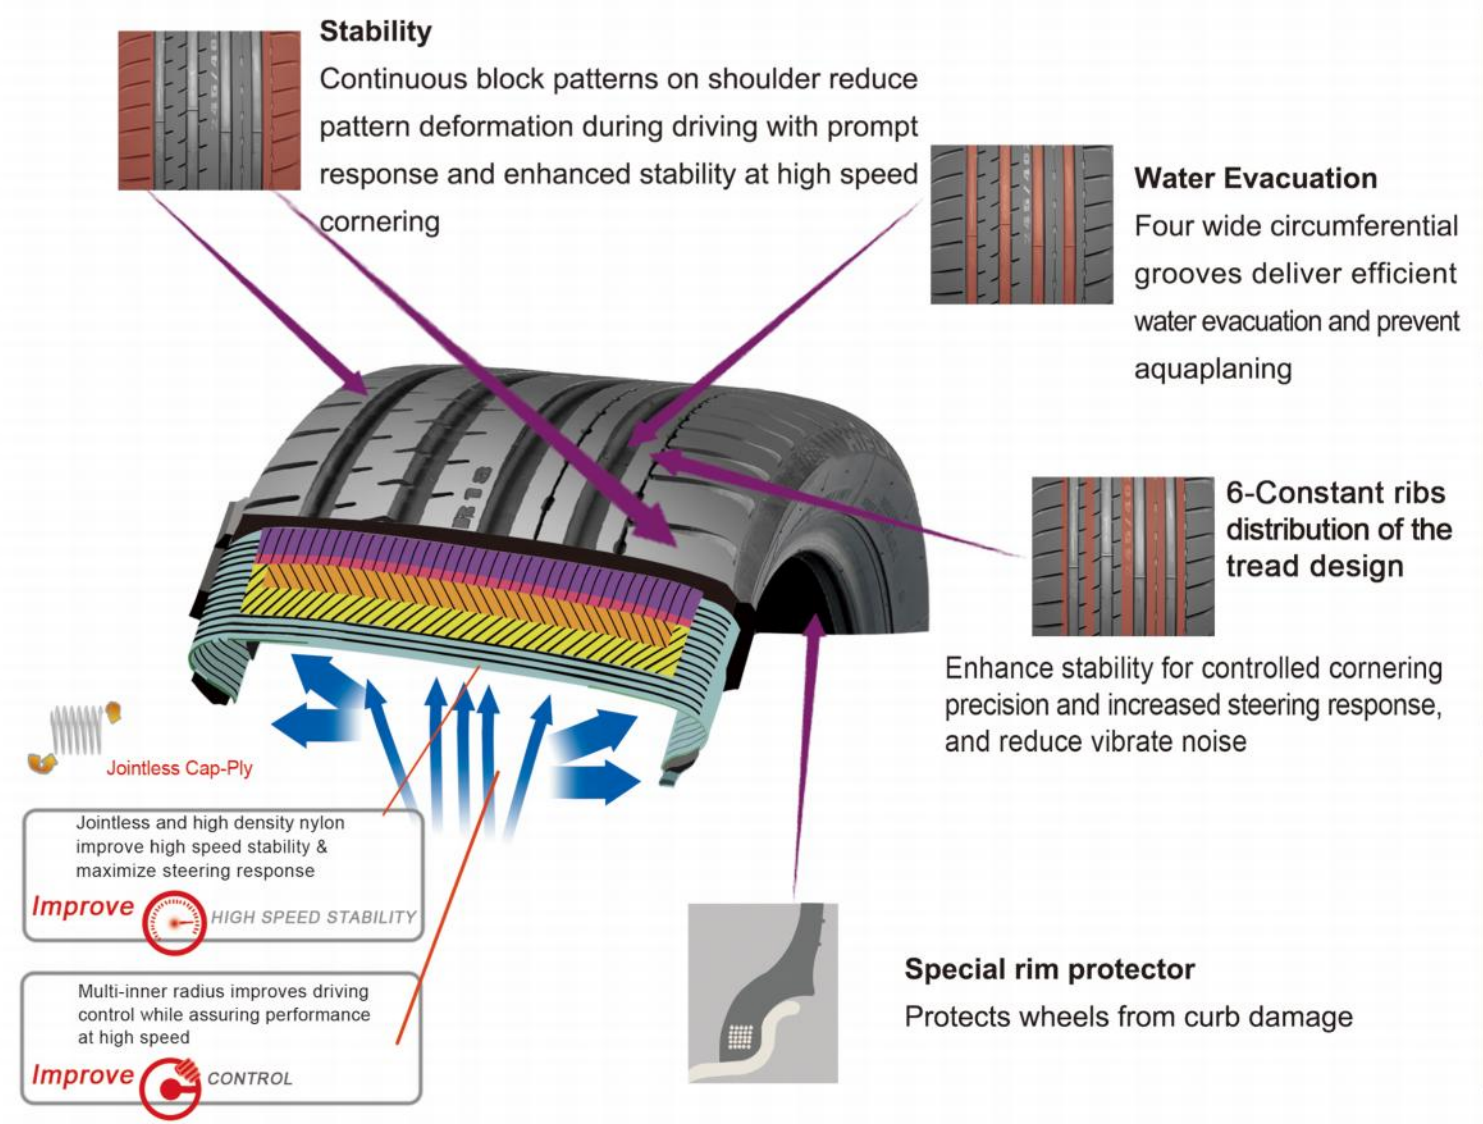

Features

- Asymmetric tread pattern design
- Sport profile shape
- 4-Wider longitudinal grooves
- 6-Constant ribs distribution of the tread design
- High Strength Steel Belt Wire and dual layer jointless nylon band
- Highly Enriched Synthetic Silica Compound

Benefits

- Better handling and performance in both wet and dry road conditions
- Ensure optimal ground contact pressure for outstanding steering response and maximum cornering grip at high speeds
- Evacuates water faster and prevent aquaplaning
- Enhance stability for controlled cornering precision and increased steering response, and reduce vibrate noise
- Perfectly absorb external shock, the durability and comfort of the tire has been greatly improved
- Better traction on dry and wet surface, ensure stable performance during powerful acceleration

HF201




12-17 Inch

50-80 Series

Speed Rating: T-W


UTQG: 400AA

PROVIDE A QUITE COMFORTABLE
AND SAFE RIDE

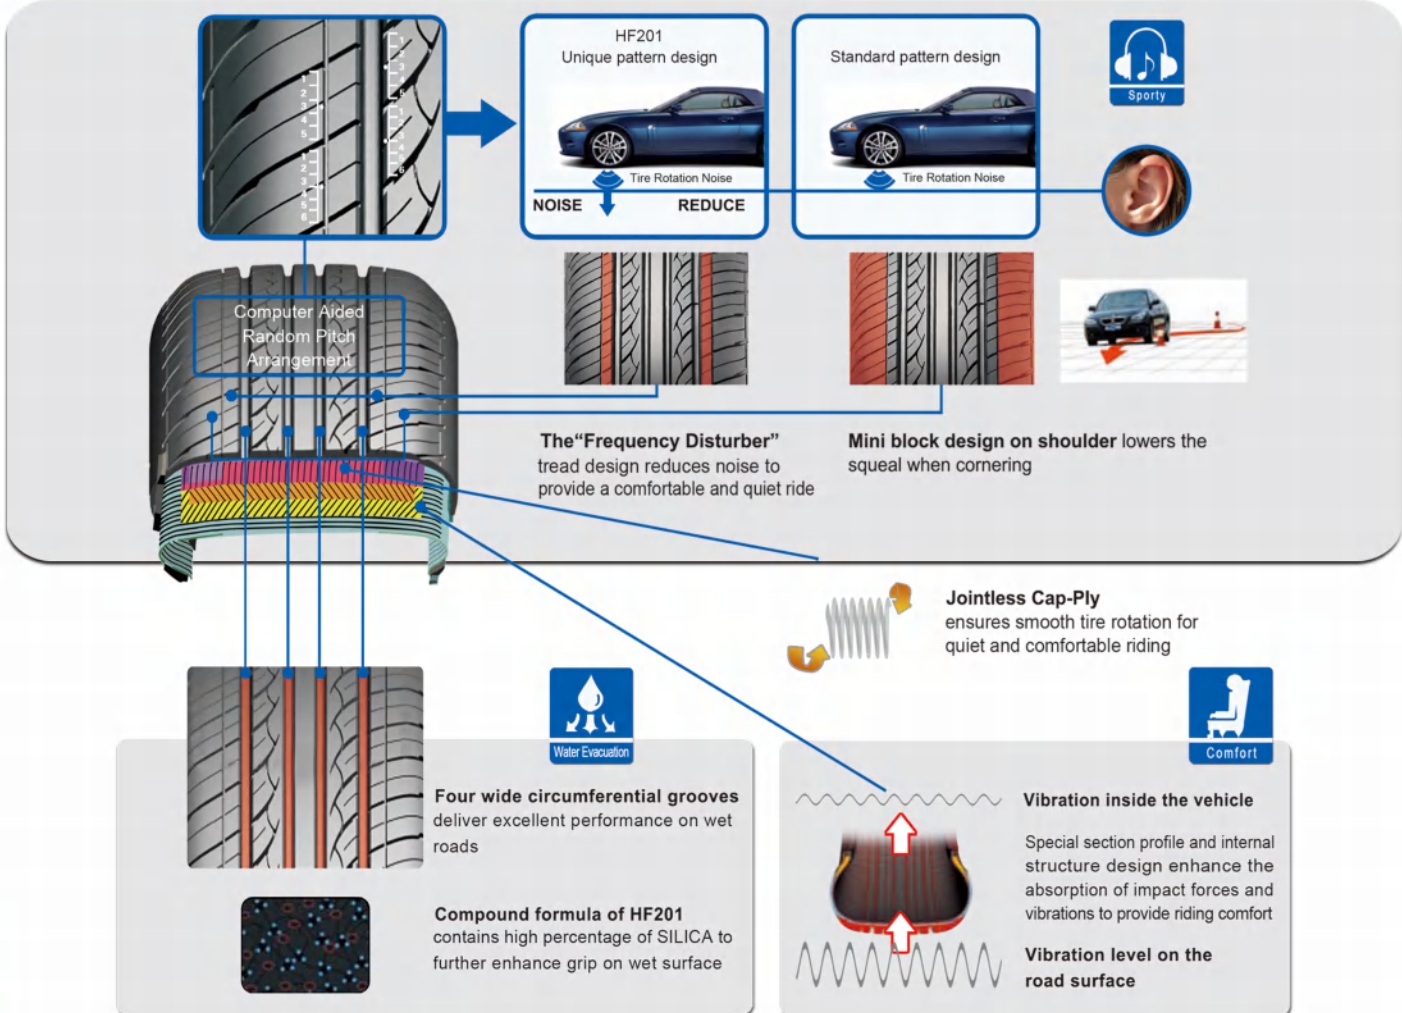

HF201

COMFORT/SPORT

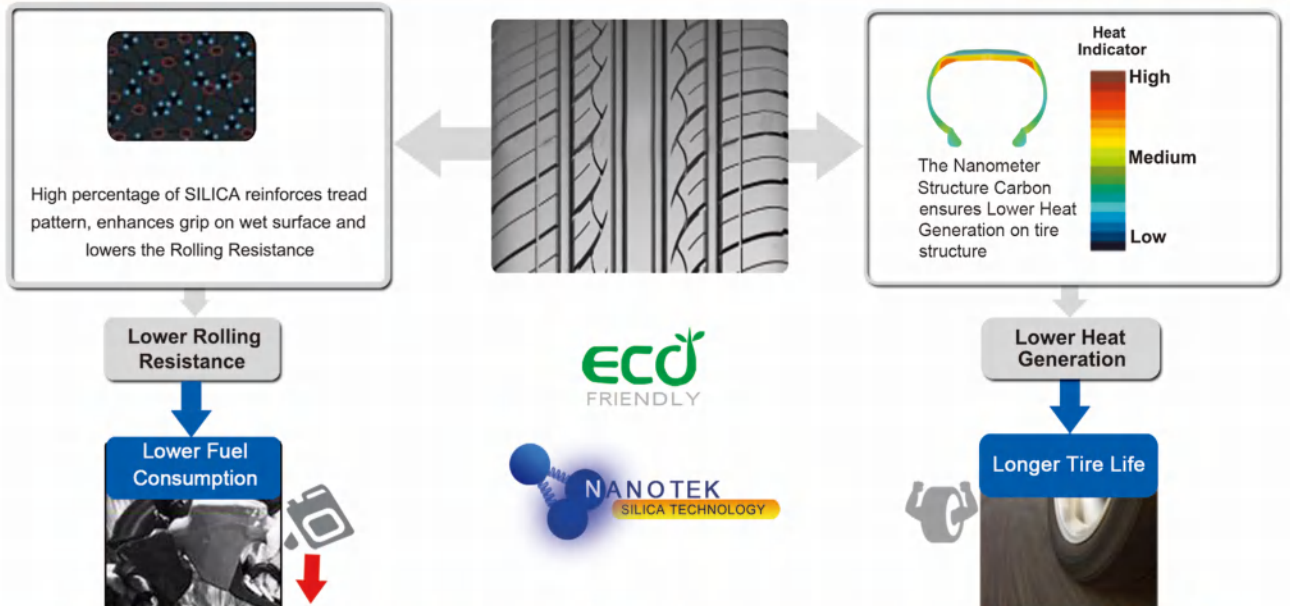

Series	Size	Load Index	Speed Rating	UTQG
12	145/70R12	69	T	400AA
	155/70R12	73	T	400AA
	165/70R12	77	T	400AA
	175/70R12	80	T	400AA
	145/80R12	74	T	400AA
	155/80R12	77	T	400AA
13	165/60R13	73	T	400AA
	175/60R13	77	H	400AA
	185/60R13	80	H	400AA
	205/60R13	86	T	400AA
	155/65R13	73	T	400AA
	165/65R13	77	T	400AA
	145/70R13	71	T	400AA
	155/70R13	75	T	400AA
	165/70R13	79	T	400AA
	175/70R13	82	T	400AA
	185/70R13	86	H	400AA
	175/75R13	84	T	400AA
	135/80R13	70	T	400AA
	155/80R13	79	T	400AA
14	165/80R13	83	T	400AA
	165/55R14	72	H	400AA
	185/55R14	80	H	400AA
	165/60R14	75	H	400AA
	175/60R14	79	H	400AA
	185/60R14	82	H	400AA
	195/60R14	86	H	400AA
	205/60R14	88	H	400AA
	155/65R14	75	T	400AA
	165/65R14	79	T	400AA
	175/65R14	82	T	400AA
	185/65R14	86	H	400AA
	165/70R14	81	T	400AA
	175/70R14	84	T	400AA
15	185/70R14	88	H	400AA
	195/70R14	91	H	400AA
	205/70R14	95	H	400AA
	215/70R14	98	H	400AA
	225/70R14	100	H	400AA
	185/80R14	93	T	400AA
16	205/50R16	87	V	400AA
	205/55R16	91	V	400AA
	215/55R16	97XL	V	400AA
	195/60R16	89	H	400AA
	205/60R16	92	V	400AA
	215/60R16	95	V	400AA
	225/60R16	98	H	400AA
	225/60R16	102XL	V	400AA
	205/65R16	95	H	400AA
	215/65R16	98	H	400AA
	215/65R16	102XL	H	400AA
	215/50R17	95XL	W	400AA
	225/50R17	98XL	W	400AA
	215/55R17	98XL	W	400AA
	225/55R17	101XL	W	400AA

Series	Size	Load Index	Speed Rating	UTQG
12	145/70R12	69	T	400AA
	155/70R12	73	T	400AA
	165/70R12	77	T	400AA
	175/70R12	80	T	400AA
	145/80R12	74	T	400AA
	155/80R12	77	T	400AA
13	165/60R13	73	T	400AA
	175/60R13	77	H	400AA
	185/60R13	80	H	400AA
	205/60R13	86	T	400AA
	155/65R13	73	T	400AA
	165/65R13	77	T	400AA
	145/70R13	71	T	400AA
	155/70R13	75	T	400AA
	165/70R13	79	T	400AA
	175/70R13	82	T	400AA
	185/70R13	86	H	400AA
	175/75R13	84	T	400AA
	135/80R13	70	T	400AA
	155/80R13	79	T	400AA
14	165/80R13	83	T	400AA
	165/55R14	72	H	400AA
	185/55R14	80	H	400AA
	165/60R14	75	H	400AA
	175/60R14	79	H	400AA
	185/60R14	82	H	400AA
	195/60R14	86	H	400AA
	205/60R14	88	H	400AA
	155/65R14	75	T	400AA
	165/65R14	79	T	400AA
	175/65R14	82	T	400AA
	185/65R14	86	H	400AA
	165/70R14	81	T	400AA
	175/70R14	84	T	400AA
15	185/70R14	88	H	400AA
	195/70R14	91	H	400AA
	205/70R14	95	H	400AA
	215/70R14	98	H	400AA
	225/70R14	100	H	400AA
	185/80R14	93	T	400AA
16	205/50R16	87	V	400AA
	205/55R16	91	V	400AA
	215/55R16	97XL	V	400AA
	195/60R16	89	H	400AA
	205/60R16	92	V	400AA
	215/60R16	95	V	400AA
	225/60R16	98	H	400AA
	225/60R16	102XL	V	400AA
	205/65R16	95	H	400AA
	215/65R16	98	H	400AA
	215/65R16	102XL	H	400AA
	215/50R17	95XL	W	400AA
	225/50R17	98XL	W	400AA
	215/55R17	98XL	W	400AA
	225/55R17	101XL	W	400AA

HF-218



13-16 Inch



60-70 Series



Speed Rating: H-V

UTQG: 400AA

STRICT QUALITY CONTROL THROUGHOUT
THE ENTIRE PROCESS

Series	Size	Load Index	Speed Rating	UTQG
13	175/70R13	82	T	400AA
14	185/60R14	82	H	400AA
	175/65R14	82	T	400AA
	185/65R14	86	H	400AA
	175/70R14	84	T	400AA
	185/70R14	88	H	400AA

Series	Size	Load Index	Speed Rating	UTQG
15	185/60R15	84	H	400AA
	195/60R15	88	V	400AA
	185/65R15	88	H	400AA
	195/65R15	91	V	400AA
	205/65R15	94	V	400AA
16	205/60R16	92	V	400AA
	215/60R16	95	V	400AA
	215/65R16	98	H	400AA

Features


- Special tread compound
- Four wide circumferential tread grooves
- Continuous solid center ribs
- Improved groove and bead profile design
- Optimized variable pitch tread design

Benefits

- Excellent grip on wet and dry roads
- Deliver excellent performance on wet roads
- Improve directional stability, provide more comfortable experience and prevent irregular wear
- Better ride stability and handling performance
- Superior comfort and quiet ride



VIGOROUS HP801



16-22 Inch

35-60 Series

Speed Rating: H-Y

UTQG: 280AAA

ULTRA HIGH PERFORMANCE
FOR LUXURY CROSOVERS AND SUV

Series	Size	Load Index	Speed Rating	UTQG
16	215/60R16	95	V	280AAA
17	215/60R17	96	H	280AAA
18	215/55R18	99XL	V	280AAA
	225/55R18	98	V	280AAA
	235/55R18	100	V	280AAA
	255/55R18	109XL	W	280AAA
	225/60R18	100	V	280AAA
	235/60R18	107XL	V	280AAA

Features

Asymmetric tread pattern

Wide circumferential grooves

A straight rib block

Silica enriched compound

Benefits

Utilizes two distinct tread patterns that enable optimal dry traction combined with all-season capability

Effectively evacuate water and significantly enhance slipping resistance for outstanding wet handling

Applied to the outside of the tire's contact patch helps to prevent decrease road noise and increase cornering grip

Provide superior traction and grip in wet and dry condition, reduce rolling resistance

Series	Size	Load Index	Speed Rating	UTQG
	245/60R18	105	V	280AAA
	255/60R18	112XL	V	280AAA
19	225/45R19	96XL	W	280AAA
	235/45R19	99XL	W	280AAA
	285/45R19	111XL	W	280AAA
	255/50R19	107XL	V	280AAA
	225/55R19	99	V	280AAA
	235/55R19	105XL	V	280AAA
	245/55R19	103	V	280AAA
	255/55R19	111XL	V	280AAA
20	275/40R20	106XL	W	280AAA
	245/45R20	99	Y	280AAA
	255/45R20	105XL	V	280AAA
	275/45R20	110XL	V	280AAA
	255/50R20	109XL	V	280AAA
	265/50R20	111XL	V	280AAA
	275/55R20	117XL	V	280AAA
21	295/40R21	111XL	W	280AAA
22	285/35R22	106XL	V	280AAA
	305/40R22	114XL	W	280AAA



VIGOROUS HT601



VIGOROUS AT601



15-17 Inch

60-85 Series

Speed Rating: R-H

UTQG: 440AA

DELIVER GRIP AND LONG TREAD WEAR
FOR ALL-SEASON HIGHWAY DRIVING

15-17 Inch

65-85 Series

Speed Rating: R-T

UTQG: 460AB

ALL-TERRAIN 4x4 SUV TIRE OUTSTANDING
ON AND OFF-ROAD PERFORMANCE

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
15	235/75R15		109XL	H	440AA
	LT235/75R15	6PR	104/101	R	
	31X10.50R15LT	6PR	109	R	

Features

Four circumferential grooves and open shoulder slots

High-density sipes with silica compound

Variable pitch pattern and optimized footprint design

Solid center ribs

Joint-less nylon band

Benefits

➤ Prevent aquaplaning with enhanced wet grip performance

➤ Deliver a smooth ride, lower noise and improve traction on dry and wet roads

➤ Superior comfort and quiet ride

➤ Provide steering stability and deliver a comfortable ride

➤ Improve tread stiffness and uniformity and deliver high speed stability

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
16	235/60R16		100	H	440AA
	215/65R16		98	H	440AA
	215/70R16		100	H	440AA
	225/70R16		103	H	440AA
	235/70R16		106	H	440AA
	245/70R16		111XL	H	440AA
	255/70R16		111	T	440AA
	265/70R16		112	H	440AA
	LT225/75R16	10PR	115/112	S	
	LT245/75R16	10PR	120/116	S	
	LT265/75R16	10PR	123/120	R	
	LT215/85R16	10PR	115/112	R	
	LT235/85R16	10PR	120/116	R	
17	215/60R17		96	H	440AA
	225/60R17		99	H	440AA
	235/60R17		102	H	440AA
	255/60R17		110XL	H	440AA
	215/65R17		103XL	H	440AA
	225/65R17		102	H	440AA
	235/65R17		108XL	H	440AA
	245/65R17		111XL	H	440AA
	255/65R17		110	H	440AA
	265/65R17		112	H	440AA
	245/70R17		110	T	440AA
	265/70R17		115	T	440AA
	LT265/70R17	10PR	121/118	S	
	LT245/75R17	10PR	121/118	S	

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
15	215/75R15		100	S	460AB
	235/75R15		109XL	S	460AB
	31×10.50R15LT	6PR	109	R	
	LT255/70R15	6PR	107/103	S	
	LT265/70R15	6PR	109/105	S	
	LT215/75R15	6PR	100/97	S	
	225/75R15C	6PR	110/108	S	
	LT235/75R15	6PR	104/101	R	

Features

Special tread compound and wide footprint

Block tread design with multiple-sipes

Open shoulder grooves

Joint-less nylon band

Strong structure design

Benefits

➤ Enhance tread life and deliver excellent braking on wet and dry roads

➤ Provide outstanding off-road traction

➤ Prevent aquaplaning with enhanced wet grip performance

➤ Improve tread stiffness and uniformity and deliver high speed stability

➤ Provide reliability and durability

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
16	235/70R16		106	T	460AB
	245/70R16		107	T	460AB
	255/70R16		111	T	460AB
	265/70R16		112	T	460AB
	245/75R16		111	S	460AB
	265/75R16		116	S	460AB
	LT245/70R16	8PR	113/110	S	
	LT265/70R16	8PR	117/114	S	
	LT275/70R16	8PR	119/116	S	
	LT225/75R16	10PR	115/112	S	
	LT245/75R16	10PR	120/116	S	
	LT265/75R16	10PR	123/120	R	
	LT285/75R16	10PR	126/123	R	
	LT215/85R16	10PR	115/112	R	
	LT235/85R16	10PR	120/116	R	
17	245/65R17		107	T	460AB
	265/65R17		112	T	460AB
	245/70R17		110	T	460AB
	265/70R17		115	T	460AB
	P285/70R17		117	T	460AB
	LT265/70R17	10PR	121/118	S	
	LT285/70R17	10PR	121/118	R	
	LT245/75R17	10PR	121/118	S	

VIGOROUS AT606



VIGOROUS AT607



SUV/4x4



15-20 Inch

55-70 Series

Speed Rating: R-H

UTQG: 460AB

OUTSTANDING PERFORMANCE IN
EXTREME DRIVING CONDITION



15-18 Inch

60-85 Series

Speed Rating: R-T

UTQG: 460AB

UNPARALLELED GRIP,
UNWAVERING SAFETY

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
15	265/70R15		112	T	460AB
16	235/65R16C	8PR	115/113	R	460AB
	245/70R16		107	T	460AB
	255/70R16		111	T	460AB
	265/70R16		112	T	460AB

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
17	265/65R17		112	T	460AB
18	265/60R18		110	T	460AB
	265/65R18		114	T	460AB
	275/65R18		116	T	460AB
	LT275/65R18	10PR	123/120	S	
	LT265/70R18	10PR	124/121	S	
	LT275/70R18	10PR	125/122	R	
20	275/55R20		113	H	460AB
	LT275/65R20	10PR	126/123	R	

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
15	31x10.50R15LT	6PR	109	R	
	215/75R15		100	S	460AB
	235/75R15		109XL	S	460AB
	LT235/75R15	6PR	104/101	R	
16	235/70R16		106	T	460AB
	245/70R16		107	T	460AB
	255/70R16		111	T	460AB
	265/70R16		112	T	460AB
	245/75R16		111	S	460AB
	265/75R16		116	S	460AB
	LT235/85R16	10PR	120/116	R	

Series	Size	Ply Rating	Load Index	Speed Rating	UTQG
17	225/65R17		106XL	T	460AB
	245/65R17		107	T	460AB
	265/65R17		112	T	460AB
	265/70R17		115	T	460AB
	LT265/70R17	10PR	121/118	S	
	P285/70R17		117	T	460AB
18	265/60R18		110	T	460AB

Features

- Angled chamfer and a deep, tapered tread block
- Zigzag-shaped traction grooves
- Developed with tread and sidewall
- Special tread compound and enhanced block stiffness

Benefits

- Creates more gripping edges, provide class-leading performance in the mud and snow
- Enhance off-road performance
- Offers excellent all-terrain traction
- Improved tread wear, wet traction and hydroplaning resistance


Features

- Angled chamfer and a deep, tapered tread block
- Zigzag-shaped traction grooves
- Developed with tread and sidewall
- Special tread compound and enhanced block stiffness

Benefits

- Creates more gripping edges, provide class-leading performance in the mud and snow
- Enhance off-road performance
- Offers excellent all-terrain traction
- Improved tread wear, wet traction and hydroplaning resistance

VIGOROUS MT601

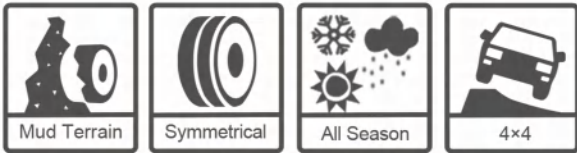

15-20 Inch

70-75 Series

Speed Rating: Q

OUTSTANDING PERFORMANCE IN
EXTREME DRIVING CONDITION

VIGOROUS MT602



15-20 Inch

60-75 Series

Speed Rating: Q

OUTSTANDING PERFORMANCE IN
EXTREME DRIVING CONDITION

Series	Size	Ply Rating	Load Index	Speed Rating
15	LT235/75R15	6PR	104/101	Q
	31×10.50R15LT	6PR	109	Q
	33×12.50R15LT	6PR	108	Q
16	LT245/75R16	10PR	120/116	Q
	LT265/75R16	10PR	123/120	Q

Series	Size	Ply Rating	Load Index	Speed Rating
17	LT265/70R17	10PR	121/118	Q
20	33×12.50R20LT	10PR	114	Q
	35×12.50R20LT	10PR	121	Q

Series	Size	Ply Rating	Load Index	Speed Rating
15	LT235/75R15	6PR	104/101	Q
	31×10.50R15LT	6PR	109	Q
	33×12.50R15LT	6PR	108	Q
16	LT245/75R16	10PR	120/116	Q
	LT265/75R16	10PR	123/120	Q

Series	Size	Ply Rating	Load Index	Speed Rating
17	LT265/65R17	10PR	120/117	Q
	LT265/70R17	10PR	121/118	Q
18	LT265/60R18	10PR	119/116	Q
20	33×12.50R20LT	10PR	114	Q
	35×12.50R20LT	10PR	121	Q

Features

- Aggressive pattern design
- High void ratio and open shoulder design
- Special casing profile and solid shoulder pattern
- Reinforced casing construction

Benefits

- Outstanding traction in all conditions
- Excellent resistance to aquaplaning and self-cleaning performance
- Enhanced traction and cornering performance
- Superior overall resistance to damage

Features

- Deep tread block
- Open blocks for mud dispersion
- Scalloped shoulders
- Designed for POR tires

Benefits

- Great off-road performance and grip
- Excellent self-cleaning
- Help prevents penetrations from road hazards
- POR*(Professional Off-Road)

SUPER2000



SUPER2000

VAN

Series	Size	Ply Rating	Load Index	Speed Rating
12	145R12LT	8PR	86/84	Q
	155R12C	8PR	88/86	Q
13	155R13C	8PR	90/88	Q
	165R13C	8PR	94/92	R
	175R13C	8PR	97/95	R
	165/70R13LT	6PR	88/86	S
14	175R14C	8PR	99/98	R
	185R14C	8PR	102/100	R
	195R14C	8PR	106/104	R
	205R14C	8PR	109/107	Q
	215R14C	8PR	112/110	Q
	175/65R14C	6PR	90/88	T
	165/70R14C	6PR	89/87	R
	175/70R14LT	6PR	95/93	S
15	195R15C	8PR	106/104	R
	205/65R15C	6PR	102/100	T
	215/65R15C	6PR	104/102	T
	195/70R15C	8PR	104/102	R
	205/70R15C	8PR	106/104	R
	215/70R15C	8PR	109/107	R
	225/70R15C	8PR	112/110	R

Series	Size	Ply Rating	Load Index	Speed Rating
16	205R16C	8PR	110/108	Q
	215/60R16C	8PR	108/106	R
	195/65R16C	8PR	104/102	T
	205/65R16C	8PR	107/105	T
	215/65R16C	8PR	109/107	T
	225/65R16C	8PR	112/110	T
	235/65R16C	8PR	115/113	T
	235/65R16C	10PR	121/119	R
	215/70R16C	6PR	108/106	T
	185/75R16C	8PR	104/102	R
	195/75R16C	8PR	107/105	R
	195/75R16C	10PR	110/108	R
	205/75R16C	8PR	110/108	R
	215/75R16C	10PR	116/114	R
	225/75R16C	12PR	121/120	R

Features

Reinforced structure composed of two steel belts and full nylon protector

Zigzag vertical groove and open horizontal groove arrangement with sipes

Special abrasion-resistant tread compound

Variable pitch pattern

Benefits

Deliver extra puncture resistance and robust load bearing capacity

Provide excellent wet and dry grip

Provide enhanced mileage with reduced heat

Superior comfort and quiet ride



SUPER9000

Tral Van300



Tral Van100



Series	Size	Ply Rating	Load Index	Speed Rating
12	5.00R12LT	10PR	88/86	P

Series	Size	Ply Rating	Load Index	Speed Rating
16	7.50R16LT	8PR	114/112	R

Features

- Reinforced structure composed of two steel belts and full nylon protector
- Zigzag vertical groove and open horizontal groove arrangement with sipes
- Special abrasion-resistant tread compound
- Wider footprint and contact pressure distribution optimization
- Solid shoulder ribs
- Variable pitch pattern

Benefits

- Deliver extra puncture resistance and robust load bearing capacity
- Provide excellent wet and dry grip
- Provide enhanced mileage with reduced heat
- Reduce vibration and provide a smooth and comfortable ride
- Provide responsive handling and even wear
- Superior comfort and quiet ride

Features

- Reinforced structure composed of two steel belts and full nylon protector
- Zigzag vertical groove and open horizontal groove arrangement with sipes
- Special abrasion-resistant tread compound
- Wider footprint and contact pressure distribution optimization
- Solid shoulder ribs
- Variable pitch pattern

Benefits

- Deliver extra puncture resistance and robust load bearing capacity
- Provide excellent wet and dry grip
- Provide enhanced mileage with reduced heat
- Reduce vibration and provide a smooth and comfortable ride
- Provide responsive handling and even wear
- Superior comfort and quiet ride

SUPER8000 GR



 12-15 Inch

 Series: LT

 Speed Rating: Q-S

DURABILITY STANDARD
A HIGH-MILEAGE TAXI TIRE SPECIFICALLY
DESIGNED FOR URBAN DAILY USE

Series	Size	Ply Rating	Load Index	Speed Rating
12	155R12C	8PR	88/86	Q
13	155R13C	8PR	90/88	Q
	165R13C	8PR	94/93	R
	165/70R13LT	6PR	88/86	S

Series	Size	Ply Rating	Load Index	Speed Rating
14	165R14C	6PR	93/91	S
	175R14C	8PR	99/98	R
	185R14C	8PR	102/100	R
	175/70R14LT	6PR	95/93	S
	175/75R14C	8PR	99/98	S
15	195/70R15C	8PR	104/102	R

Features

- Reinforced structure with a two-layer steel belt package and a full nylon overlay
- A sinuous longitudinal main groove combined with diagonal lateral grooves, complemented by fine slots
- Specially formulated highly wear-resistant tread compound.
- Wide contact patch for optimized contact pressure distribution.
- Continuous shoulder ribs
- Variable pitch tread design
- Dual-ply carcass structure design

Benefits

- Not only does it effectively protect the tread from punctures, but it also delivers exceptional tire durability
- Delivers excellent grip on both wet and dry roads
- Reduces heat build-up, enhances durability, and extends driving mileage
- Effectively cushions road shocks for a more comfortable ride
- Ensures excellent handling and reduces irregular wear
- Effectively reduces noise for a quieter, more comfortable ride
- Improves load-carrying capacity and reduces deformation during use



HF-261



12-16 Inch

50-80 Series

Speed Rating: T-V

UTQG: 400AA

PERFORMANCE STANDARD
TOURING TIRE SPECIFICALLY
DESIGNED FOR EVERYDAY DRIVING

Features

Symmetrical 4-Wider longitudinal grooves

Integral lateral grooves and high-density sipes

Variable-pitch arrangement and optimised tread pattern block

Special Silica tread compound

Benefits

Provides Excellent water channeling and anti-hydroplaning

Improve wet grip, ensured safety from braking performance on wet roads

Reduced noise emission, provide a smooth and comfortable ride

Excellent grip on wet and dry surfaces, reduce rolling resistance

Series	Size	Ply Rating	Load Index	Speed Rating
12	155/70R12	73	T	400AA
	175/70R12	80	T	400AA
13	155/65R13	73	T	400AA
	165/65R13	77	T	400AA
	155/70R13	75	T	400AA
	165/70R13	79	T	400AA
	175/70R13	82	H	400AA
	185/70R13	86	H	400AA
14	175/60R13	77	H	400AA
	175/75R13	84	T	400AA
	155/80R13	79	T	400AA
	165/60R14	75	H	400AA
	175/60R14	79	H	400AA
	185/60R14	82	H	400AA
	195/60R14	86	H	400AA
	205/60R14	88	H	400AA
	155/65R14	75	T	400AA
	165/65R14	79	T	400AA
15	175/65R14	82	H	400AA
	185/65R14	86	H	400AA
	165/70R14	81	T	400AA
	175/70R14	84	T	400AA
	185/70R14	88	H	400AA
	195/70R14	91	H	400AA
16	175/75R14	86	T	400AA

Series	Size	Ply Rating	Load Index	Speed Rating
15	195/50R15	82	V	400AA
	185/55R15	82	V	400AA
16	195/55R15	85	V	400AA
	185/60R15	84	H	400AA
	195/60R15	88	H	400AA
	205/60R15	91	H	400AA
	185/65R15	88	H	400AA
	195/65R15	91	H	400AA
17	205/65R15	94	H	400AA
	205/70R15	96	H	400AA
	215/70R15	98	H	400AA
	195/55R16	91XL	V	400AA
	205/55R16	91	V	400AA
	205/60R16	92	H	400AA
	215/60R16	95	H	400AA
	225/60R16	98	H	400AA
	205/65R16	95	H	400AA
	215/65R16	98	H	400AA

HF-266



13-16 Inch

55-75 Series

Speed Rating: T-V

UTQG: 400AA

PERFORMANCE STANDARD
TOURING TIRE SPECIFICALLY
DESIGNED FOR EVERYDAY DRIVING

Series	Size	Ply Rating	Load Index	Speed Rating
13	175/60R13	77	H	400AA
	175/70R13	82	H	400AA
	175/75R13	84	T	400AA
14	185/60R14	82	H	400AA
	175/65R14	82	H	400AA
	185/65R14	86	H	400AA
	175/70R14	84	T	400AA
	185/70R14	88	H	400AA
	175/75R14	86	T	400AA

Series	Size	Ply Rating	Load Index	Speed Rating
15	195/55R15	85	V	400AA
	185/60R15	84	H	400AA
	195/60R15	88	H	400AA
	205/60R15	91	H	400AA
16	185/65R15	88	H	400AA
	195/65R15	91	H	400AA
	205/65R15	94	H	400AA
	195/55R16	91XL	V	400AA
	205/55R16	91	V	400AA
	205/60R16	92	H	400AA
17	205/65R16	95	H	400AA
	215/65R16	98	H	400AA

Features

Symmetrical 4-Wider longitudinal grooves

Integral lateral grooves and high-density sipes

Variable-pitch arrangement and optimised tread pattern block

Special Silica tread compound

Benefits

Provides Excellent water channeling and anti-hydroplaning

Improve wet grip, ensured safety from braking performance on wet roads

Reduced noise emission, provide a smooth and comfortable ride

Excellent grip on wet and dry surfaces, reduce rolling resistance

SUPER5000



12-16 Inch

Series

Speed Rating: Q-R

SPECIALLY DESIGNED DURABLE TYRE FOR
COMMERCIAL VANS AND TRANSPORT VEHICLES

Series	Size	Ply Rating	Load Index	Speed Rating
12	155R12C	8PR	88/86	Q
13	165R13C	8PR	94/92	R
14	185R14C	8PR	102/100	R
	195R14C	8PR	106/104	R

Series	Size	Ply Rating	Load Index	Speed Rating
15	195R15C	8PR	106/104	R
	195/70R15C	8PR	104/102	R
	205/70R15C	8PR	106/104	R
	215/70R15C	8PR	109/107	R
	225/70R15C	8PR	112/110	R
16	195/75R16C	8PR	107/105	R
	205/75R16C	8PR	110/108	R
	225/75R16C	12PR	121/120	R

Features

- Robust and solid pattern design
- Zigzag-shaped traction grooves
- Reinforced new casing construction
- New durable tread compound

Benefits

- Provides good performance and protection, even under severe use
- Enhance traction on road and off-road
- Improves durability and robustness in toughest driving conditions
- Improved tread wear, offers a longer tyre life



ALL-TURI 221



Features

- Asymmetric pattern
- High grip silica compound
- Two straight & two semi zigzag longitudinal grooves
- Two types sipes

Benefits

- Multi-performance harmony for total balanced all season driving
- Improved snow / wet traction and lowered rolling resistance
- Reduced ground resistance enables a smoother flow over water and snow, ensure the best wet and snow traction performance
- The application of summer and winter sipes allows the tire to possess high summer capabilities and winter capabilities

ALL-TURI 221

Series	Size	Load Index	Speed Rating
12	175/70R12	80	T
13	155/65R13	73	T
	165/65R13	77	T
	155/70R13	75	T
	165/70R13	79	T
	175/70R13	82	T
	155/80R13	79	T
14	185/55R14	80	H
	165/60R14	75	H
	185/60R14	82	H
	155/65R14	75	T
	165/65R14	79	T
	175/65R14	82	T
	185/65R14	86	T
	165/70R14	81	T
	175/70R14	88XL	T
	185/70R14	88	T
15	195/50R15	86XL	V
	175/55R15	77	T
	185/55R15	86XL	H
	195/55R15	85	H
	155/60R15	74	H
	165/60R15	77	T
	185/60R15	88XL	H
	195/60R15	88	H
	145/65R15	72	T
	165/65R15	81	T
	175/65R15	88XL	T
	185/65R15	88	H
	195/65R15	91	H
	195/65R15	95XL	H
	205/65R15	94	H

ALL SEASON

Series	Size	Load Index	Speed Rating
16	195/45R16	84XL	V
	205/45R16	87XL	V
	185/50R16	81	H
	195/50R16	88XL	V
	195/55R16	91XL	V
	205/55R16	94XL	V
	215/55R16	97XL	V
	225/55R16	99XL	V
	205/60R16	96XL	V
	215/60R16	99XL	H
	235/60R16	100	H
	215/65R16	102XL	H
	215/70R16	100	H
17	205/45R17	88XL	V
	215/45R17	91XL	V
	225/45R17	94XL	V
	245/45R17	99XL	V
	205/50R17	93XL	V
	215/50R17	95XL	V
	225/50R17	98XL	V
	205/55R17	95XL	V
	215/55R17	98XL	V
	225/55R17	101XL	V
	235/55R17	103XL	V
	215/60R17	96	H
	225/60R17	99	H
	225/65R17	102	H
	235/65R17	108XL	H
18	225/40R18	92XL	V
	245/40R18	97XL	V
	225/45R18	95XL	V
	235/45R18	98XL	V
	245/45R18	100XL	V
	235/50R18	101XL	V
	215/55R18	99XL	V
	225/55R18	98	V
	235/55R18	104XL	V
	235/60R18	107XL	V
19	235/55R19	105XL	W

ALL-TURI 228



ALL SEASON PERFORMANCE
TIRE FOR PASSENGER CARS

16-20 Inch

35-60 Series

Speed Rating: V-Y

Series	Size	Load Index	Speed Rating
16	215/45R16	90XL	V
	185/55R16	87XL	V
17	205/40R17	84XL	V
	215/40R17	87XL	W
	235/45R17	97XL	W
18	235/40R18	95XL	V
	215/50R18	92	W
	225/50R18	99XL	W
	225/60R18	104XL	V

Series	Size	Load Index	Speed Rating
19	235/35R19	91XL	Y
	235/40R19	96XL	Y
20	245/40R19	98XL	Y
	225/45R19	96XL	Y
	235/45R19	99XL	Y
21	245/45R19	102XL	W
	255/45R19	104	W
	235/50R19	103	W
	225/55R19	99	V
	235/55R19	105XL	W

Series	Size	Load Index	Speed Rating
20	275/40R20	106XL	V
	245/45R20	103	W
21	255/45R20	105XL	W
	235/50R20	104	W

Features

- Unidirectional tread design with double "V-shaped" lateral grooves
- Wide & high angled grooves
- "Multi-Wave" Sipes
- High-grip silica compound
- High Strength Steel Belt Wire and Jointless edge and cap nylon band

Benefits

- Efficiently maximizes water draining performance and delivers much more safety for driving on wet roads
- Improved drainage performance
- Stay in control through every season, Trust in reliable all-season grip and braking performance
- Outstanding wet grip as well as reliable grip even at low temperatures, and lowered rolling resistance
- Improved tread stiffness and uniformity, perfectly absorb external shock, the durability and comfort of the tire has been greatly improved



ALL-TRANSIT



14-17 Inch

60-75 Series

Speed Rating: R-T

ALL SEASON PERFORMANCE TIRE
FOR COMMERCIAL VAN

Series	Size	Ply Rating	Load Index	Speed Rating
14	175/70R14LT	6PR	95/93	S
15	215/65R15C	6PR	104/102	T
	195/70R15C	8PR	104/102	R
	215/70R15C	8PR	109/107	R
	225/70R15C	8PR	112/110	R


Series	Size	Ply Rating	Load Index	Speed Rating
16	195/60R16C	6PR	99/97	T
	215/60R16C	8PR	108/106	T
	195/65R16C	8PR	104/102	R
	205/65R16C	8PR	107/105	T
	215/65R16C	8PR	109/107	T
	225/65R16C	8PR	112/110	R
	235/65R16C	8PR	115/113	T
	195/75R16C	10PR	110/108	R
	205/75R16C	10PR	113/111	R
	215/75R16C	10PR	116/114	R
	225/75R16C	12PR	121/120	R
17	215/60R17C	8PR	109/107	T

Features

- Balanced pattern design
- High grip silica compound
- Three zigzag grooves
- Optimised sipe sequence on all four ribs

Benefits

- Maximised for winter performance, boasts dry and wet performance on par with most summer tires
- It provides excellent driving performance under all weather conditions Improved snow / wet traction and lowered rolling resistance
- To secure safety on wet roads, to satisfy both hydroplaning and snow performance
- For all surfaces from normal roads to rain and snow

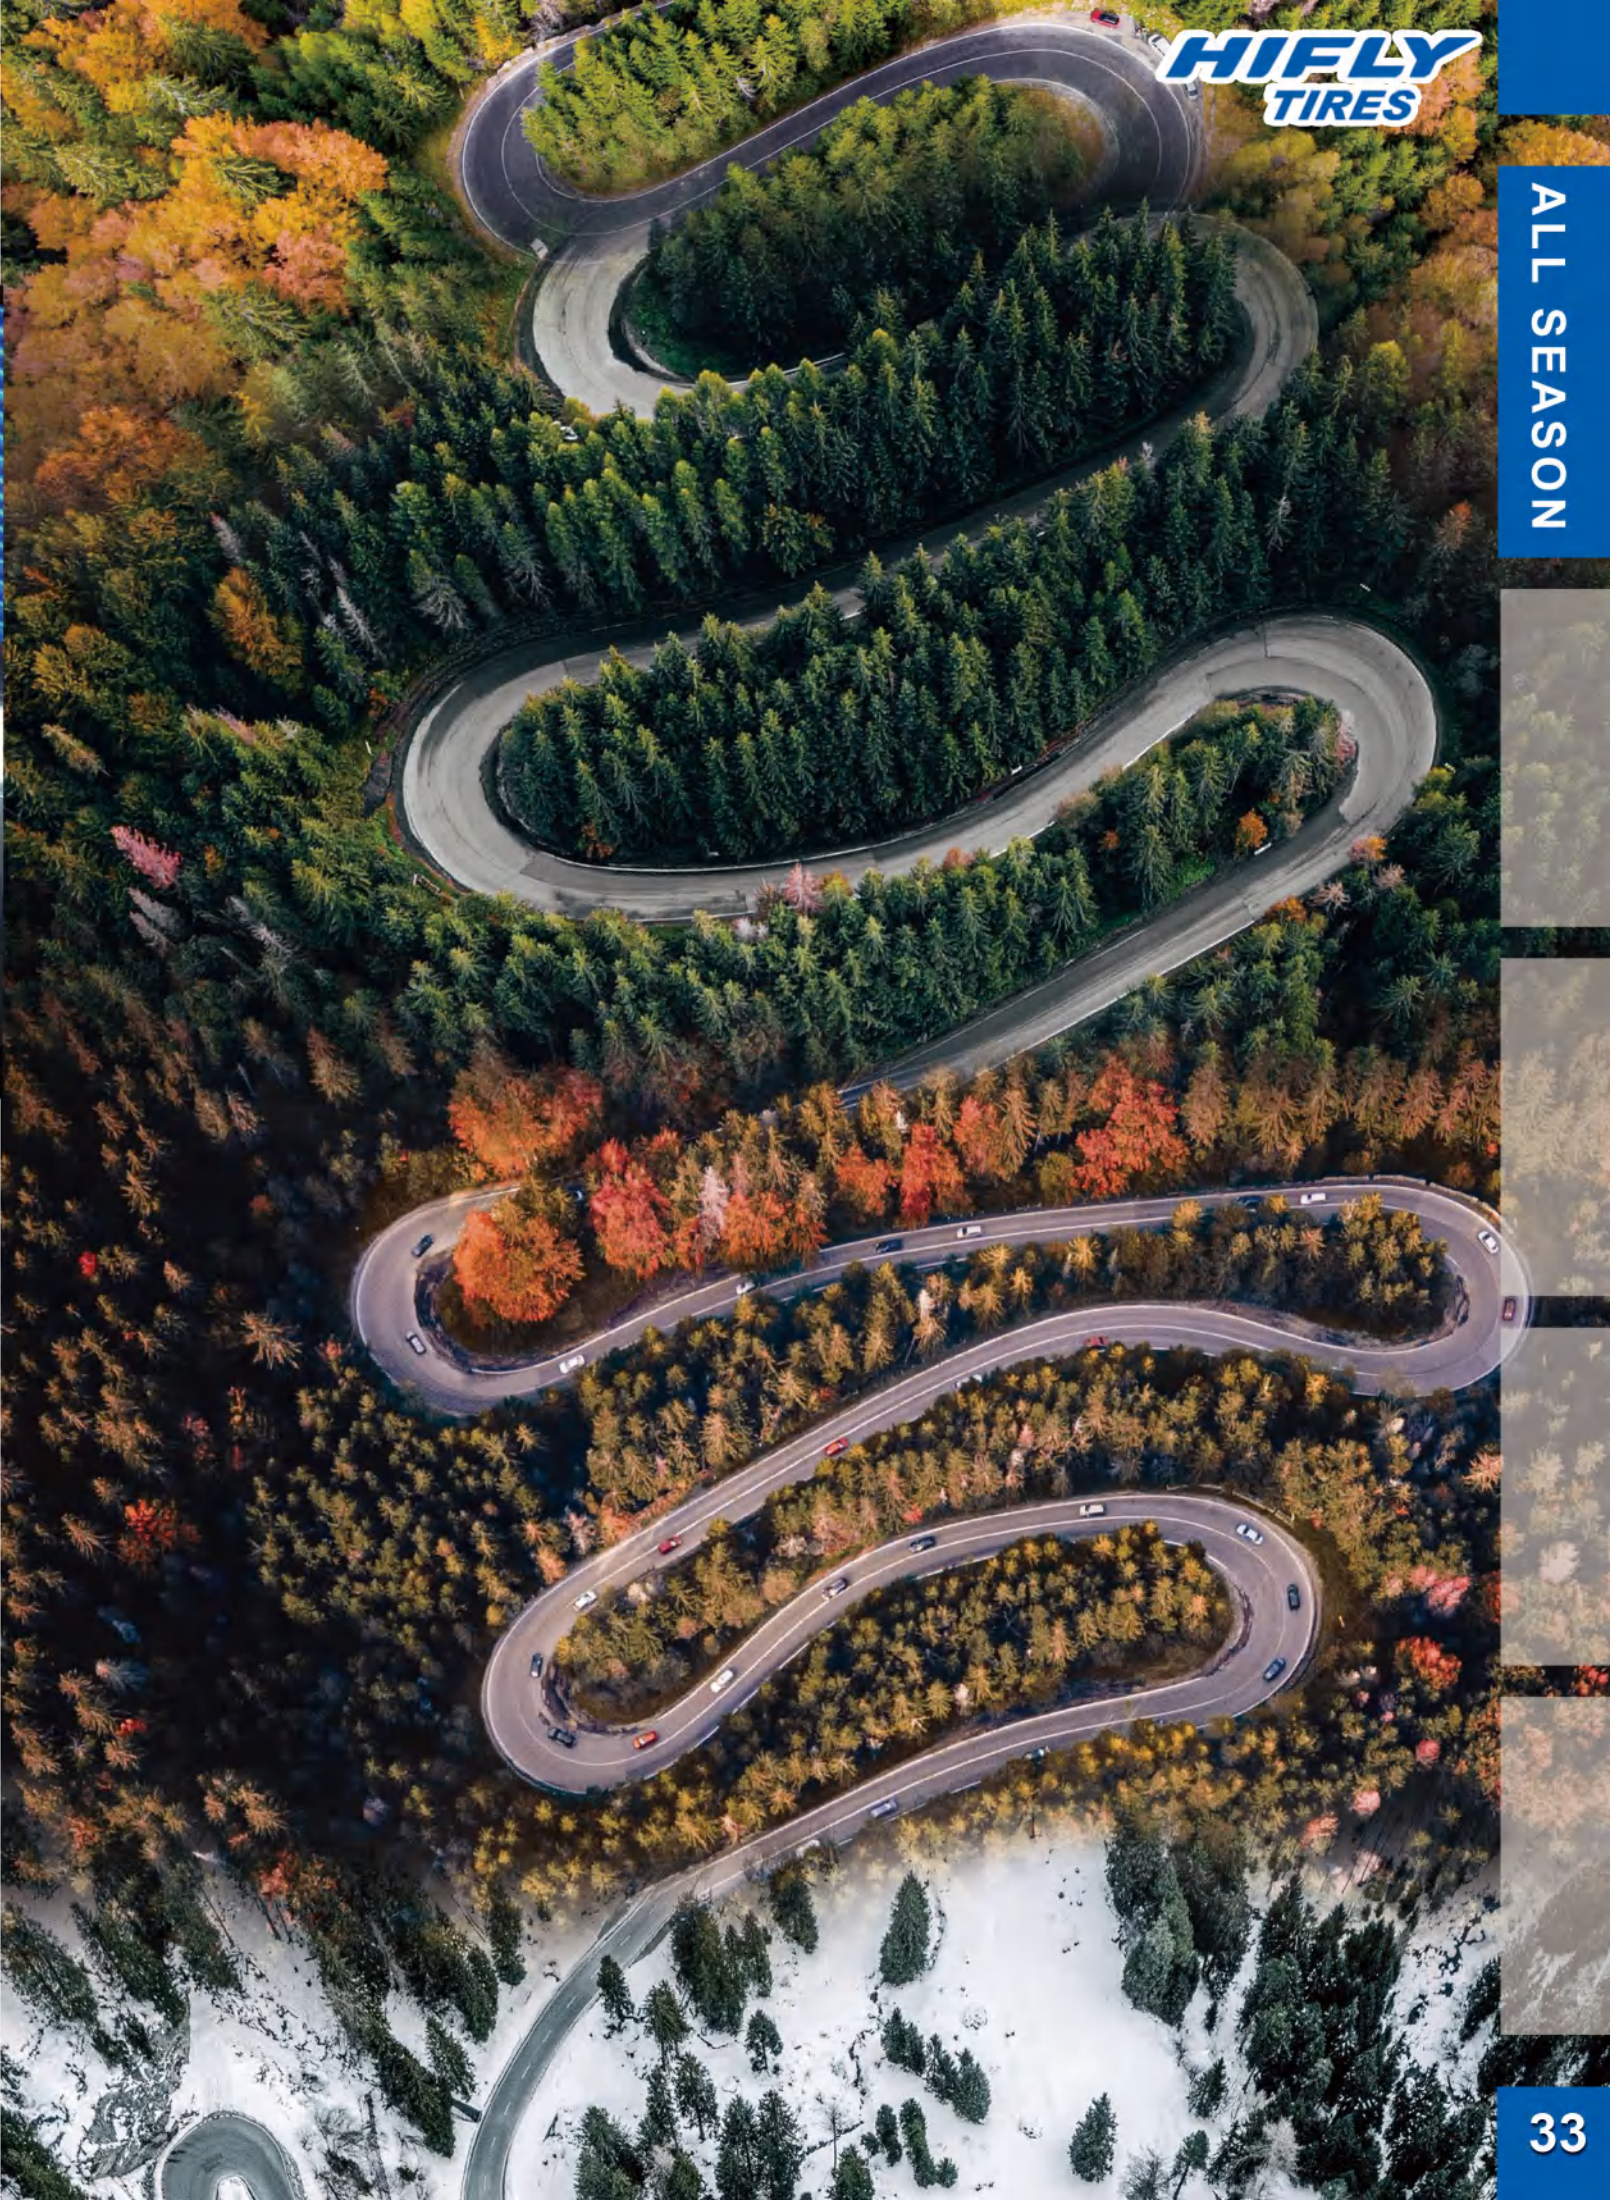

eHF-501



15-19 Inch

50-65 Series

Speed Rating: H-W

UTQG: 400AA

LOW ROLLING RESISTANCE-LOW
NOISE-HIGH TRACTION.SPECIFICALLY
DESIGNED FOR ELECTRIC VEHICLES

Series	Size	Load Index	Speed Rating	UTQG
15	195/65R15	91	V	400AA
16	175/55R16	80	H	400AA
	205/55R16	94XL	V	400AA
	195/60R16	89	H	400AA
	205/60R16	96XL	V	400AA
	215/60R16	95	V	400AA
17	225/50R17	98XL	V	400AA
	205/50R17	93XL	V	400AA
	215/50R17	95XL	W	400AA
	205/55R17	95XL	V	400AA
	215/55R17	98XL	V	400AA
	225/55R17	101XL	W	400AA
	215/60R17	100XL	V	400AA
	225/60R17	103XL	H	400AA
	225/65R17	106XL	H	400AA
	235/65R17	108XL	H	400AA
18	215/50R18	96XL	W	400AA
	225/50R18	99XL	W	400AA
	215/55R18	99XL	V	400AA
	225/55R18	98	V	400AA
	225/60R18	104XL	H	400AA
	235/60R18	103	W	400AA
19	225/55R19	103XL	V	400AA

Features

- 4-Wider longitudinal grooves
- Multi-curves sipes replaced lateral grooves
- Full depth and high-density sipes
- Tension control optimization profile
- High Strength Steel Belt Wire and Jointless nylon band
- Cutting-edge Silica-reinforced Tread Compound

Benefits

- Evacuates water faster and prevent aquaplaning
- Reduce vibrate noise, achieved max-touch continuous footprint, provide max-torque and smooth quiet ride
- Ensured safety from braking performance, including in wet conditions
- Improve contact pressure distribute, reduced rolling deformation and generate heat, bring enduring and reliable performance
- Perfectly absorb external shock, the durability and comfort of the tire has been greatly improved
- Increases contact area and reduces rolling resistance, better wet grip and wear life



eHF-508 SPORT



HANDLING-COMFORTABLE-LOW ROLLING
RESISTANCE, SPECIFICALLY DESIGNED FOR
SPORT ELECTRIC VEHICLES

17-21 Inch

40-55 Series

Speed Rating: V-Y

UTQG: 280AAA

Series	Size	Ply Rating	Load Index	Speed Rating
17	235/55R17	103XL	W	280AAA
18	225/45R18	95XL	W	280AAA
	235/45R18	98XL	W	280AAA
	245/45R18	100XL	W	280AAA
	235/50R18	101XL	Y	280AAA
	235/55R18	104XL	V	280AAA
19	235/40R19	96XL	W	280AAA
	235/45R19	99XL	W	280AAA
	245/45R19	102XL	Y	280AAA
	255/45R19	104XL	W	280AAA
	235/50R19	103XL	V	280AAA
	235/55R19	105XL	Y	280AAA
	245/55R19	107XL	V	280AAA
20	245/40R20	99XL	Y	280AAA
	255/40R20	101XL	W	280AAA
	255/45R20	101	V	280AAA
	265/45R20	108XL	W	280AAA
	245/50R20	102	W	280AAA
	255/50R20	109XL	V	280AAA
	235/55R20	105XL	W	280AAA
21	265/40R21	105XL	V	280AAA
	255/45R21	105XL	V	280AAA
	265/45R21	108XL	Y	280AAA
	275/45R21	110XL	Y	280AAA

Features

New low noise tread pattern design

4-Wider longitudinal grooves and asymmetric tread pattern design

Sport profile shape and wide shoulder

Tension control optimization profile

High Strength Steel Belt Wire and Jointless nylon band

Cutting-edge Silica-reinforced Tread Compound

Benefits

Effectively reduce the sound frequency generated by the tire grounding, reduce the vibration and noise, and provide a smooth and comfortable driving experience

Better handling and performance in both wet and dry road conditions

Ensure optimal ground contact pressure for outstanding steering response and maximum cornering grip at high speeds

Improve contact pressure distribute, reduced rolling deformation and generate heat, bring enduring and reliable performance

Perfectly absorb external shock, the durability and comfort of the has been greatly improved

Increases contact area and reduces rolling resistance, better wet grip and wear life



Tral Van 500



16 Inch

Series:LT

Speed Rating: R

HANDLING-COMFORTABLE-LOW ROLLING
RESISTANCE, SPECIFICALLY DESIGNED FOR
SPORT ELECTRIC VEHICLES

Features

- Wide tread design
- Deep, wide tread patterns
- Low-pressure operation compatible
- High-strength wear-resistant rubber
- Reinforced puncture-resistant structure
- Lightweight construction

Benefits

- Prevents sinking in sand
- Boosts sand traction
- Extends service life
- Improves handling agility
- Withstands high-temperature harsh environments
- Versatile for sand, mud, snow

Series	Size	Ply Rating	Load Index	Speed Rating
16	225/95R16C	8PR	118/116	R



HF909



12-17 Inch

50-70 Series

Speed Rating: T-V

UTQG:600AA

High-strength carcass for enhanced reliability and durability

Features	Benefits
Deep groove tread pattern	Improves tire durability
Extremely high land-sea ratio	Increases the tire's contact patch and enhances wear resistance
Variable pitch tread design	Effectively reduces noise for a quieter more comfortable ride
High-strength carcass structure	Effectively reduces noise for a quieter more comfortable ride

Series	Size	Load Index	Speed Rating	UTQG	Series	Size	Load Index	Speed Rating	UTQG
12	145/70R12	69	T	600AA	16	205/55R16	91	V	600AA
	165/70R12	77	T	600AA		215/60R16	95	H	600AA
13	155/65R13	73	T	600AA		195/60R16	89	H	600AA
	165/65R13	77	T	600AA		205/60R16	92	V	600AA
	165/70R13	79	H	600AA	17	205/50R17	93 XL	V	600AA
	175/70R13	82	H	600AA		215/50R17	95 XL	V	600AA
14	165/60R14	75	H	600AA		215/55R17	98 XL	V	600AA
	185/60R14	82	H	600AA					
	195/60R14	86	H	600AA					
	175/65R14	82	H	600AA					
	185/65R14	86	H	600AA					
	175/70R14	84	T	600AA					
	185/70R14	88	T	600AA					
15	195/55R15	85	H	600AA					
	185/60R15	84	H	600AA					
	195/60R15	88	H	600AA					
	205/60R15	91	H	600AA					
	185/65R15	88	H	600AA					
	195/65R15	91	H	600AA					
	205/65R15	94	H	600AA					
	205/70R15	96	H	600AA					





Speed Symbols

SI	KM/H
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
Z	Above240

Load Capacity Index

LI	KG	LI	KG	LI	KG	LI	KG
50	190	70	335	90	600	110	1060
51	195	71	345	91	615	111	1090
52	200	72	355	92	630	112	1120
53	206	73	365	93	650	113	1150
54	212	74	375	94	670	114	1180
55	218	75	387	95	690	115	1215
56	224	76	400	96	710	116	1250
57	230	77	412	97	730	117	1285
58	236	78	425	98	750	118	1320
59	243	79	437	99	775	119	1360
60	250	80	450	100	800	120	1400
61	257	81	462	101	825	121	1450
62	265	82	475	102	850	122	1500
63	272	83	487	103	875	123	1550
64	280	84	500	104	900	124	1600
65	290	85	515	105	925	125	1650
66	300	86	530	106	950	126	1700
67	307	87	545	107	975	127	1750
68	315	88	560	108	1000	128	1800
69	325	89	580	109	1030	129	1850
						130	1900